


Submittal Data Sheet

Wilco-CO MVI - NSF 61/372 Pressure Boosting System




CO4 MVI-1SB-320

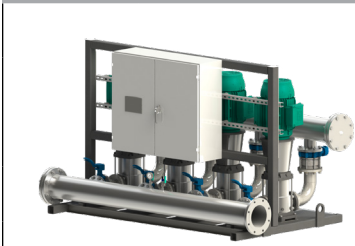

Project:	
Engineer:	
Contractor:	
Submitted By:	Date:
Approved By:	Date:

Tag #	Model #	Flow	BOOST PSI	Min. Inlet PSI	HP/Pump	Phase	Voltage	RPM
	CO4 MVI-1SB-320				1			3600

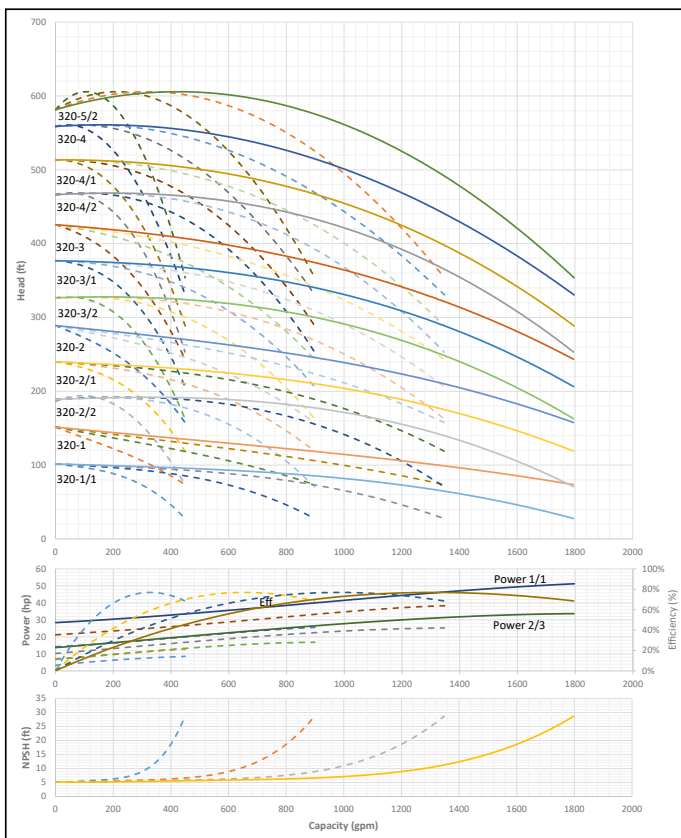

Applications

- Water Supply
- Agriculture
- Washing / Sprinkling Systems
- Pressure Boosting
- Cooling Circuits
- Condensate Return

Materials of Construction

Volute	AISI 304 Stainless Steel with Cast Iron ANSI flanges
Impeller	AISI 304 Stainless Steel
Shaft	ANSI 431 Stainless Steel
Elastomers	EPDM
Manifold	AISI 304 Stainless Steel
Suction Isolation Valves	150# Cast Iron Wafer Butterfly, All Stainless Steel Wetted Components
Discharge Isolation Valve	150# Cast Iron Wafer Butterfly, All Stainless Steel Wetted Components or 300# 304SS Ball Valve
Check Valve	Wafer Style, 316 Stainless Steel internals, non-slam, plunger type with EPDM seal/ cast iron body
Mechanical Seal	Frame and Springs 304SS
Pressure Transducers	¼" MNPT, 316 Stainless Steel
Pressure Gauges	¼" MNPT, 304 Stainless Steel Housing with 316 Stainless Steel wetted parts
System Base	Epoxy Coated A-500 Steel Tubing and A36 C-Channel/Plates

Technical Data - Operational Ranges

Liquid Temp Range	5°F to 248°F (Min. 32 °F for Domestic Water)
Ambient Temp Range	+32°F to +104 °F

Technical Data - Panel


Liquid Temp Range	208-230/460~3 or 575~3
Enclosure	NEMA 3R up to 20 HP NEMA 12 for 25 HP and above (NEMA 4 and 4X available upon request)
Standard	Meets UL 508A
Variable Frequency Drives	Danfoss FC-101: • 1 HP to 3 HP 208-230V~1 IN / 208-230V~3 OUT • 1 HP to 60 HP 208-230V~3 • 1 HP to 100 HP 460V~3 • 1 HP to 100 HP 575V~3

Technical Data - PLC

User Interface	7" Diagonal Color LCD Touchscreen
Display Resolution	800 x 480 Pixels
Supply Voltage	24VDC
Max. Current Consumption	320mA@24V
Number of Analog Inputs	4
Number of Analog Outputs	4
Number of Digital Inputs	18
Number of Digital Outputs	17
Onboard Communications	Modbus Protocol (Optional Gateways for BACnet, LonWorks, and CANbus)
Ethernet Port	RJ45 port capable of transmitting data 10/100Mbps
Additional Ports	2.0 USB Port; Micro-SD Port

Motor Data

Power Supply	208-230, 460, 575~3
Motor Enclosure	Totally Enclosed Fan Cooled (TEFC)
Motor Efficiency	Nema Premium Efficiency - Meets NEMA 12-12 Rule
Enclosure Construction	Rolled Steel / Cast Iron
Motor Protection Index	IP54
Insulation Class	F

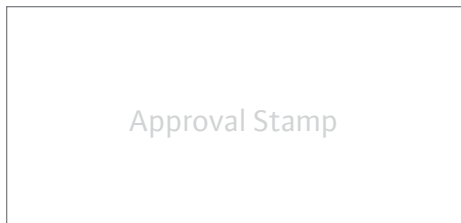


Submittal Data Sheet

Wilo-CO MVI - NSF 61/372 Pressure Boosting System



CO4 MVI-1SB-320

150# Discharge

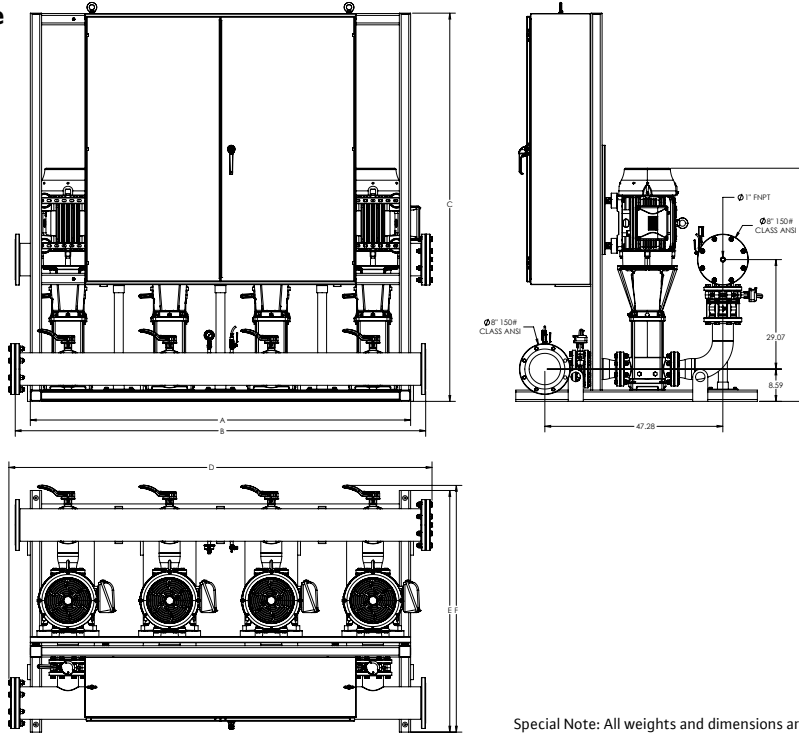

Special Note: All weights and dimensions are approximate and should not be used as exact rough-in dimensions

CO4 MVI-1SB-320

TEFC Motor Data (Per Motor)

Model	Article	HP	Voltage	Phase	System Header Size (ANSI)	Pmax (PSI)	Dimensions - Inches (in)								System Weight (Lbs)	Motor FLA (per pump)	System FLA
							A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	H (in)	(A)			
CO4 MVI-1SB-320-1/1	3355020	7.5	208V-230V	~3	8" 150#	232	67.25	75.25	61.1	78.62	64.16	65.56	42.16	3085.06	19.2-17.3	85-73	
CO4 MVI-1SB-320-1	3355021	15	208V-230V	~3	8" 150#	232	92	100	61.1	103.37	64.16	65.56	50.62	4009.79	38.5-34.8	165-153.8	
CO4 MVI-1SB-320-2/2	3355022	15	208V-230V	~3	8" 150#	232	92	100	61.1	103.37	64.16	65.56	53.86	4044.43	38.5-34.8	165-153.8	
CO4 MVI-1SB-320-2/1	3355023	20	208V-230V	~3	8" 150#	232	92	100	91.1	103.37	64.16	65.56	53.86	3903.27	50.2-45.4	211.8	
CO4 MVI-1SB-320-2	3355024	25	208V-230V	~3	8" 150#	232	92	100	91.1	103.37	64.16	65.56	56.12	4215.95	63.0-57.6	261	
CO4 MVI-1SB-320-3/2	3355025	30	208V-230V	~3	8" 150#	232	92	100	103.1	103.37	64.16	65.56	59.37	4317.38	76.7-68.4	305	
CO4 MVI-1SB-320-3/1	3355026	40	208V-230V	~3	8" 150#	232	101	109	103.1	112.37	64.16	65.56	61.92	4985.31	101-92.6	415.8	
CO4 MVI-1SB-320-3	3355027	40	208V-230V	~3	8" 150#	232	101	109	103.1	112.37	64.16	65.56	61.92	4985.31	101-92.6	415.8	
CO4 MVI-1SB-320-1/1	3355310	7.5	460V	~3	8" 150#	232	67.25	75.25	61.1	78.62	64.16	65.56	42.16	2780.75	8.67	45	
CO4 MVI-1SB-320-1	3355311	15	460V	~3	8" 150#	232	92	100	61.1	103.37	64.16	65.56	50.62	4009.79	17.4	74.6	
CO4 MVI-1SB-320-2/2	3355312	15	460V	~3	8" 150#	232	92	100	61.1	103.37	64.16	65.56	53.86	4044.43	17.4	74.6	
CO4 MVI-1SB-320-2/1	3355313	20	460V	~3	8" 150#	232	92	100	61.1	103.37	64.16	65.56	53.86	4076.43	22.7	99.8	
CO4 MVI-1SB-320-2	3355314	25	460V	~3	8" 150#	232	92	100	61.1	103.37	64.16	65.56	56.12	4389.11	28.8	118.2	
CO4 MVI-1SB-320-3/2	3355315	30	460V	~3	8" 150#	232	92	100	61.1	103.37	64.16	65.56	59.37	4468.43	34.2	139.4	
CO4 MVI-1SB-320-3/1	3355316	40	460V	~3	8" 150#	232	101	109	91.1	112.37	64.16	65.56	61.92	4945.71	46.3	197.8	
CO4 MVI-1SB-320-3	3355317	40	460V	~3	8" 150#	232	101	109	91.1	112.37	64.16	65.56	61.92	4945.71	46.3	197.8	
CO4 MVI-1SB-320-1/1	3355600	7.5	575V	~3	8" 150#	232	67.25	75.25	61.1	78.62	64.16	65.56	42.16	2791.99	6.94	34.2	
CO4 MVI-1SB-320-1	3355601	15	575V	~3	8" 150#	232	92	100	71.1	103.37	64.16	65.56	50.62	3568.18	13.8	63.8	
CO4 MVI-1SB-320-2/2	3355602	15	575V	~3	8" 150#	232	92	100	71.1	103.37	64.16	65.56	53.86	3602.82	13.8	63.8	
CO4 MVI-1SB-320-2/1	3355603	20	575V	~3	8" 150#	232	92	100	71.1	103.37	64.16	65.56	53.86	3634.82	18.2	86.6	
CO4 MVI-1SB-320-2	3355604	25	575V	~3	8" 150#	232	92	100	91.1	103.37	64.16	65.56	56.12	4187.95	23	103.8	
CO4 MVI-1SB-320-3/2	3355605	30	575V	~3	8" 150#	232	92	100	91.1	103.37	64.16	65.56	59.37	4299.27	27.4	127	
CO4 MVI-1SB-320-3/1	3355606	40	575V	~3	8" 150#	232	101	109	91.1	112.37	64.16	65.56	61.92	4961.71	37	172.6	
CO4 MVI-1SB-320-3	3355607	40	575V	~3	8" 150#	232	101	109	91.1	112.37	64.16	65.56	61.92	4961.71	37	172.6	


Submittal Data Sheet

Wilo-CO MVI - NSF 61/372 Pressure Boosting System



CO4 MVI-1SB-320

300# Discharge

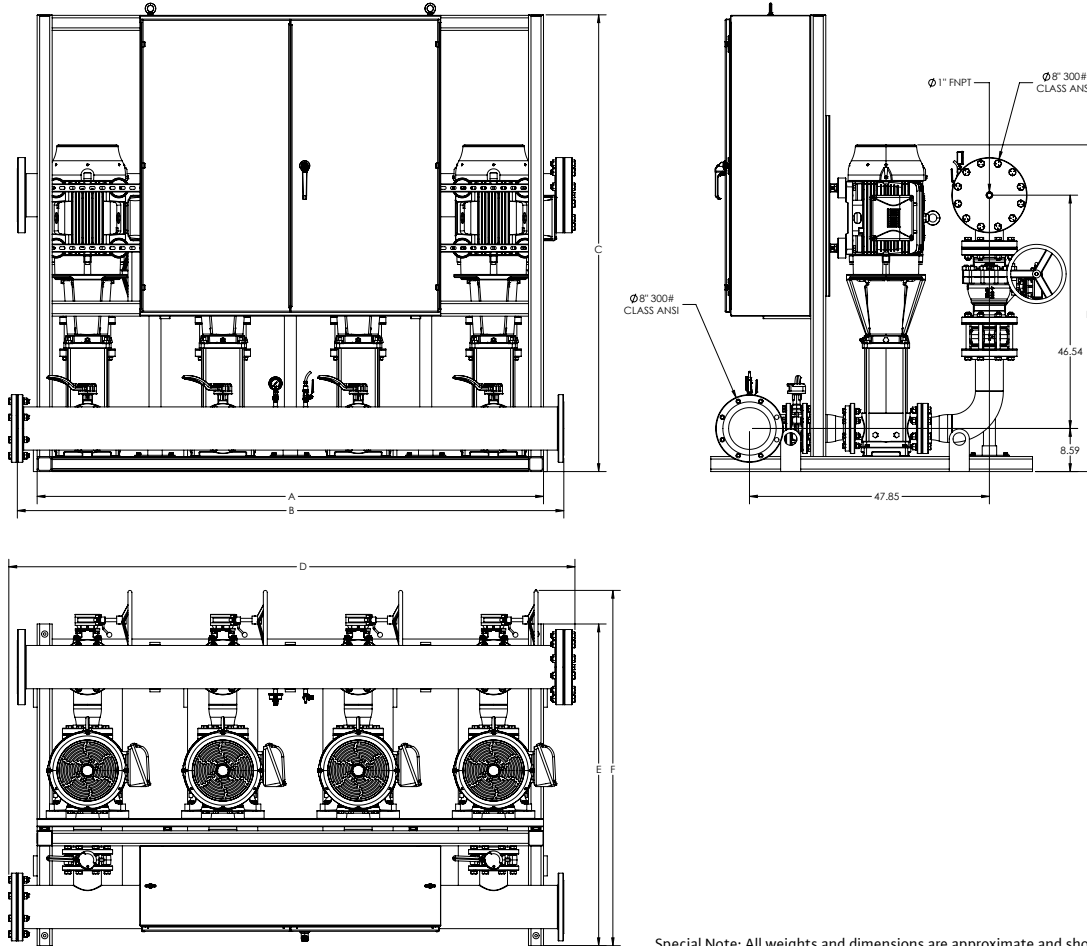

Special Note: All weights and dimensions are approximate and should not be used as exact rough-in dimensions

CO4 MVI-1SB-320

TEFC Motor Data
(Per Motor)

Model	Article	HP	Voltage	Phase	System Header Size (ANSI)	Pmax (PSI)	Dimensions - Inches (In)								System Weight (Lbs)	Motor FLA	System
							A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	H (in)	(per pump)		FLA	
CO4 MVI-1SB-320-4/2	3355028	40	208V-230V	~3	8" 300#	435	101	109	103.1	112.87	64.16	70.86	65.17	5554.75	101-92.6	415.8	
CO4 MVI-1SB-320-4/2	3355318	40	460V	~3	8" 300#	435	101	109	91.1	112.87	64.16	70.86	65.17	5515.15	46.3	197.8	
CO4 MVI-1SB-320-4/1	3355319	50	460V	~3	8" 300#	435	101	109	91.1	112.87	64.16	70.86	65.17	5726.59	56.1	243.4	
CO4 MVI-1SB-320-4	3355320	50	460V	~3	8" 300#	435	101	109	91.1	112.87	64.16	70.86	65.17	5726.59	56.1	243.4	
CO4 MVI-1SB-320-5/2	3355321	60	460V	~3	8" 300#	435	121	129	92.1	132.87	65.23	71.25	72.15	7066.3	67	291	
CO4 MVI-1SB-320-4/2	3355608	40	575V	~3	8" 300#	435	101	109	91.1	112.87	64.16	69.98	65.17	5531.15	37	172.6	
CO4 MVI-1SB-320-4/1	3355609	50	575V	~3	8" 300#	435	101	109	103.1	112.87	64.16	69.98	65.17	5694.19	44.9	209	
CO4 MVI-1SB-320-4	3355610	50	575V	~3	8" 300#	435	101	109	103.1	112.87	64.16	69.98	65.17	5694.19	44.9	209	
CO4 MVI-1SB-320-5/2	3355611	60	575V	~3	8" 300#	435	121	129	104.1	132.87	65.23	71.25	72.15	7096.15	53.6	254.2	