


Submittal Data Sheet

Wilo-CO MVI – NSF 61/372 Pressure Boosting System

wilo®

CO4 MVI-5



Project:

Engineer:

Contractor:


Submitted By:

Date:

Approved By:

Date:

Tag #	Model #	Flow	BOOST PSI	Min. Inlet PSI	HP/Pump	Phase	Voltage	RPM
	CO4 MVI-5				1			3600

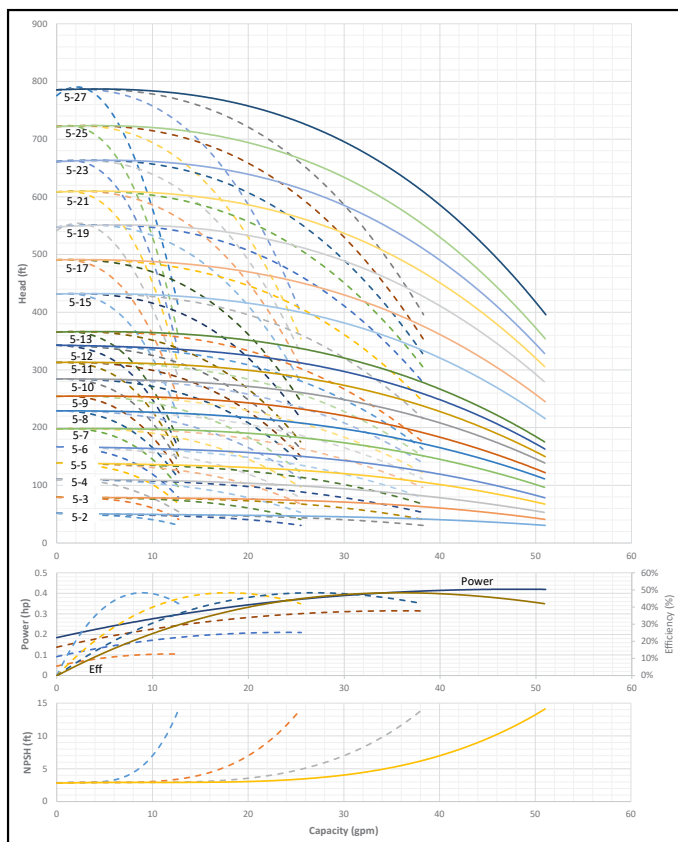

Applications

- Water Supply
- Pressure Boosting
- Agriculture
- Cooling Circuits
- Washing / Sprinkling Systems
- Condensate Return

Materials of Construction

Volute	AISI 304 Stainless Steel with Cast Iron ANSI flanges
Impeller	AISI 304 Stainless Steel
Shaft	ANSI 431 Stainless Steel
Elastomers	EPDM
Manifold	AISI 304 Stainless Steel
Suction Isolation Valves	150# Cast Iron Wafer Butterfly, All Stainless Steel Wetted Components
Discharge Isolation Valve	150# Cast Iron Wafer Butterfly, All Stainless Steel Wetted Components or 300# 304SS Ball Valve
Check Valve	Wafer Style, 316 Stainless Steel internals, non-slam, plunger type with EPDM seal/ cast iron body
Mechanical Seal	Frame and Springs 304SS
Pressure Transducers	¼" MNPT, 316 Stainless Steel
Pressure Gauges	¼" MNPT, 304 Stainless Steel Housing with 316 Stainless Steel wetted parts
System Base	Epoxy Coated A-500 Steel Tubing and A36 C-Channel/Plates

Technical Data – Operational Ranges

Liquid Temp Range	5°F to 248°F (Min. 32 °F for Domestic Water)
Ambient Temp Range	+32°F to +104 °F

Technical Data – Panel

Voltage	208-230/460~3 or 575~3
Enclosure	NEMA 3R up to 20 HP NEMA 12 for 25 HP and above (NEMA 4 and 4X available upon request)
Standard	Meets UL 508A
Variable Frequency Drives	Danfoss FC-101: • 1 HP to 3 HP 208-230V~1 IN / 208-230V~3 OUT • 1 HP to 60 HP 208-230V~3 • 1 HP to 100 HP 460V~3 • 1 HP to 100 HP 575V~3

Technical Data – PLC

User Interface	7" Diagonal Color LCD Touchscreen
Display Resolution	800 x 480 Pixels
Supply Voltage	24VDC
Max. Current Consumption	320mA@24V
Number of Analog Inputs	4
Number of Analog Outputs	4
Number of Digital Inputs	18
Number of Digital Outputs	17
Onboard Communications	Modbus Protocol (Optional Gateways for BACnet, LonWorks, and CANbus)
Ethernet Port	RJ45 port capable of transmitting data 10/100Mbps
Additional Ports	2.0 USB Port; Micro-SD Port

Motor Data

Power Supply	208-230, 460, 575~3
Motor Enclosure	Totally Enclosed Fan Cooled (TEFC)
Motor Efficiency	Nema Premium Efficiency – Meets NEMA 12-12 Rule
Enclosure Construction	Rolled Steel / Cast Iron
Motor Protection Index	IP54
Insulation Class	F

Approval Stamp

Wilo-CO MVI – NSF 61/372 Pressure Boosting System

CO4 MVI-5

Technical drawings of the 4-Port 1/2" NPT Female x 1/2" NPT Male Valve Assembly. The drawings include a front view, a side view, and a top view. The front view shows four valves in a row with dimensions A, B, and C. The side view shows the profile of the valve assembly with dimensions 16.10 and 7.56. The top view shows the top of the valve assembly with dimensions D, E, and F. A special note states: "Special Note: All weights and dimensions are approximate and shown for informational purposes only."

Special Note: All weights and dimensions are approximate and should not be used as exact rough-in dimensions

CO4 MVI-5															TEFC Motor Data (Per Motor)	
															Motor FLA (per pump)	System FLA
Dimensions - Inches (In)																
Model	Article	HP	Voltage	Phase	System Header Size (ANSI)	Pmax (PSI)	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	H (in)	System Weight (Lbs)	(A)	
CO4 MVI-5-2	3353106	0.33	208V-230V	~1 IN / ~3 OUT	2" 150#	363	47	51.75	62.16	54.3	36	43.73	25.74	744.51	1.33-1.2	12.2
CO4 MVI-5-3	3353107	0.33	208V-230V	~1 IN / ~3 OUT	2" 150#	363	47	51.75	62.16	54.3	36	43.73	25.74	744.51	1.33-1.2	12.2
CO4 MVI-5-4	3353108	0.5	208V-230V	~1 IN / ~3 OUT	2" 150#	363	47	51.75	62.16	54.3	36	43.73	26.85	755.71	1.86-1.69	12.2
CO4 MVI-5-5	3353109	0.5	208V-230V	~1 IN / ~3 OUT	2" 150#	363	47	51.75	62.16	54.3	36	43.73	27.55	755.71	1.86-1.69	12.2
CO4 MVI-5-6	3353110	0.75	208V-230V	~1 IN / ~3 OUT	2" 150#	363	47	51.75	62.16	54.3	36	43.73	28.26	763.71	2.5-2.26	23.4
CO4 MVI-5-7	3353111	0.75	208V-230V	~1 IN / ~3 OUT	2" 150#	363	47	51.75	62.16	54.3	36	43.73	28.93	767.71	2.5-2.26	23.4
CO4 MVI-5-8	3353112	1	208V-230V	~1 IN / ~3 OUT	2" 150#	363	47	51.75	62.16	54.3	36	43.73	29.24	773.71	3.32-3	23.4
CO4 MVI-5-9	3353113	1	208V-230V	~1 IN / ~3 OUT	2" 150#	363	47	51.75	62.16	54.3	36	43.73	29.95	773.71	3.32-3	23.4
CO4 MVI-5-10	3353114	1	208V-230V	~1 IN / ~3 OUT	2" 150#	363	47	51.75	62.16	54.3	36	43.73	30.66	777.71	3.32-3	23.4
CO4 MVI-5-11	3353115	1.5	208V-230V	~1 IN / ~3 OUT	2" 150#	363	47	51.75	62.16	54.3	36	43.73	33.34	830.51	4.13-3.74	61.8
CO4 MVI-5-12	3353116	1.5	208V-230V	~1 IN / ~3 OUT	2" 150#	363	47	51.75	62.16	54.3	36	43.73	34.05	834.51	4.13-3.74	61.8
CO4 MVI-5-13	3353117	1.5	208V-230V	~1 IN / ~3 OUT	2" 150#	363	47	51.75	62.16	54.3	36	43.73	34.75	838.51	4.13-3.74	61.8
CO4 MVI-5-15	3353118	2	208V-230V	~1 IN / ~3 OUT	2" 150#	363	47	51.75	62.16	54.3	36	43.73	37	866.51	5.46-4.94	61.8
CO4 MVI-5-17	3353119	2	208V-230V	~1 IN / ~3 OUT	2" 150#	363	47	51.75	62.16	54.3	36	43.73	38.42	874.51	5.46-4.94	61.8
CO4 MVI-5-2	3353485	0.33	208V-230V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	25.74	640.99	1.33-1.2	12.2
CO4 MVI-5-3	3353486	0.33	208V-230V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	25.74	640.99	1.33-1.2	12.2
CO4 MVI-5-4	3353487	0.5	208V-230V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	26.85	652.19	1.86-1.69	12.2

Submittal Data Sheet

Wilo-CO MVI – NSF 61/372 Pressure Boosting System



CO4 MVI-5 150# Discharge															TEFC Motor Data (Per Motor)	
															Motor FLA (per pump)	System FLA
Model	Article	HP	Voltage	Phase	System Header Size (ANSI)	Pmax (PSI)	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	H (in)	System Weight (Lbs)	(A)	
CO4 MVI-5-5	3353488	0.5	208V-230V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	27.55	652.19	1.86-1.69	12.2
CO4 MVI-5-6	3353489	0.75	208V-230V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	28.26	660.19	2.5-2.26	12.2
CO4 MVI-5-7	3353490	0.75	208V-230V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	28.93	664.19	2.5-2.26	12.2
CO4 MVI-5-8	3353491	1	208V-230V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	29.24	670.19	3.32-3	12.2
CO4 MVI-5-9	3353492	1	208V-230V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	29.95	670.19	3.32-3	12.2
CO4 MVI-5-10	3353493	1	208V-230V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	30.66	674.19	3.32-3	12.2
CO4 MVI-5-11	3353494	1.5	208V-230V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	33.34	726.99	4.13-3.74	28.2
CO4 MVI-5-12	3353495	1.5	208V-230V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	34.05	730.99	4.13-3.74	28.2
CO4 MVI-5-13	3353496	1.5	208V-230V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	34.75	734.99	4.13-3.74	28.2
CO4 MVI-5-15	3353497	2	208V-230V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	37	762.99	5.46-4.94	28.2
CO4 MVI-5-17	3353498	2	208V-230V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	38.42	770.99	5.46-4.94	28.2
CO4 MVI-5-2	3353974	0.33	460V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	25.74	640.99	0.602	8.2
CO4 MVI-5-3	3353975	0.33	460V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	25.74	640.99	0.602	8.2
CO4 MVI-5-4	3353976	0.5	460V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	26.85	652.19	0.843	8.2
CO4 MVI-5-5	3353977	0.5	460V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	27.55	652.19	0.843	8.2
CO4 MVI-5-6	3353978	0.75	460V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	28.26	660.19	1.13	8.2
CO4 MVI-5-7	3353979	0.75	460V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	28.93	664.19	1.13	8.2
CO4 MVI-5-8	3353980	1	460V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	29.24	670.19	1.5	8.2
CO4 MVI-5-9	3353981	1	460V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	29.95	670.19	1.5	8.2
CO4 MVI-5-10	3353982	1	460V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	30.66	674.19	1.5	8.2
CO4 MVI-5-11	3353983	1.5	460V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	33.34	726.99	1.87	14.6
CO4 MVI-5-12	3353984	1.5	460V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	34.05	730.99	1.87	14.6
CO4 MVI-5-13	3353985	1.5	460V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	34.75	734.99	1.87	14.6
CO4 MVI-5-15	3353986	2	460V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	37	762.99	2.47	14.6
CO4 MVI-5-17	3353987	2	460V	~3	2" 150#	363	47	51.75	62.16	54.3	36	39.9	38.42	770.99	2.47	14.6
CO4 MVI-5-2	3354463	0.33	575V	~3	2" 150#	363	47	51.75	62.16	54.3	36	41.71	25.74	644.23	0.482	15
CO4 MVI-5-3	3354464	0.33	575V	~3	2" 150#	363	47	51.75	62.16	54.3	36	41.71	25.74	644.23	0.482	15
CO4 MVI-5-4	3354465	0.5	575V	~3	2" 150#	363	47	51.75	62.16	54.3	36	41.71	26.85	578.23	0.674	15
CO4 MVI-5-5	3354466	0.5	575V	~3	2" 150#	363	47	51.75	62.16	54.3	36	41.71	27.55	578.23	0.674	15
CO4 MVI-5-6	3354467	0.75	575V	~3	2" 150#	363	47	51.75	62.16	54.3	36	41.71	28.26	663.43	0.904	15
CO4 MVI-5-7	3354468	0.75	575V	~3	2" 150#	363	47	51.75	62.16	54.3	36	41.71	28.93	667.43	0.904	15
CO4 MVI-5-8	3354469	1	575V	~3	2" 150#	363	47	51.75	62.16	54.3	36	41.71	29.24	673.43	1.2	15
CO4 MVI-5-9	3354470	1	575V	~3	2" 150#	363	47	51.75	62.16	54.3	36	41.71	29.95	673.43	1.2	15
CO4 MVI-5-10	3354471	1	575V	~3	2" 150#	363	47	51.75	62.16	54.3	36	41.71	30.66	677.43	1.2	15
CO4 MVI-5-11	3354472	1.5	575V	~3	2" 150#	363	47	51.75	62.16	54.3	36	41.71	33.34	730.23	1.5	15
CO4 MVI-5-12	3354473	1.5	575V	~3	2" 150#	363	47	51.75	62.16	54.3	36	41.71	34.05	734.23	1.5	15
CO4 MVI-5-13	3354474	1.5	575V	~3	2" 150#	363	47	51.75	62.16	54.3	36	41.71	34.75	738.23	1.5	15
CO4 MVI-5-15	3354475	2	575V	~3	2" 150#	363	47	51.75	62.16	54.3	36	41.71	37	766.23	1.98	15
CO4 MVI-5-17	3354476	2	575V	~3	2" 150#	363	47	51.75	62.16	54.3	36	41.71	38.42	774.23	1.98	15


Submittal Data Sheet

Wilo-CO MVI – NSF 61/372 Pressure Boosting System



CO4 MVI-5

300# Discharge

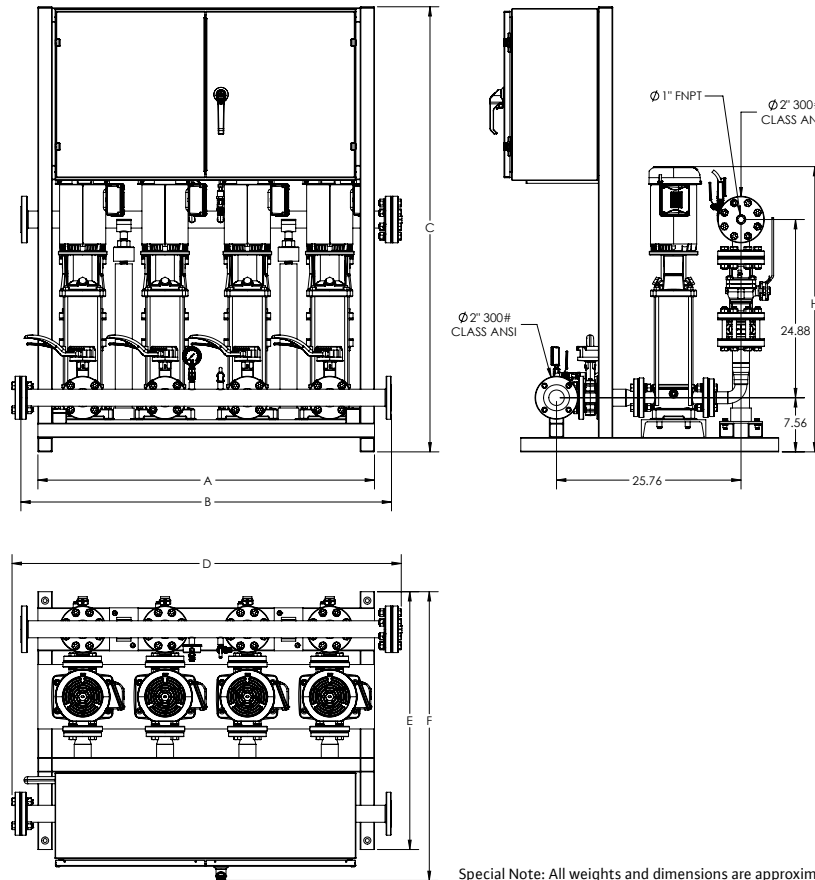

Special Note: All weights and dimensions are approximate and should not be used as exact rough-in dimensions

CO4 MVI-5

TEFC Motor Data (Per Motor)

Dimensions – Inches (in)															Motor FLA (per pump)	System FLA
Model	Article	HP	Voltage	Phase	System Header Size (ANSI)	Pmax (PSI)	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	H (in)	System Weight (Lbs)	(A)	
CO4 MVI-5-19	3353120	2	208V-230V	~1 IN / ~3 OUT	2" 300#	363	47	51.75	62.16	54.42	36	40.23	39.84	983.45	5.46-4.94	61.8
CO4 MVI-5-21	3353121	3	208V-230V	~1 IN / ~3 OUT	2" 300#	363	60	64.75	62.16	67.42	38	42.23	43.79	1227.11	8.12-7.34	61.8
CO4 MVI-5-23	3353122	3	208V-230V	~1 IN / ~3 OUT	2" 300#	363	60	64.75	62.16	67.42	38	42.23	45.21	1235.11	8.12-7.34	61.8
CO4 MVI-5-25	3353123	3	208V-230V	~1 IN / ~3 OUT	2" 300#	363	60	64.75	62.16	67.42	38	42.23	46.62	1239.11	8.12-7.34	61.8
CO4 MVI-5-27	3353124	3	208V-230V	~1 IN / ~3 OUT	2" 300#	363	60	64.75	62.16	67.42	38	42.23	48.04	1247.11	8.12-7.34	61.8
CO4 MVI-5-19	3353499	2	208V-230V	~3	2" 300#	363	47	51.75	62.16	54.42	36	36.4	39.84	879.94	5.46-4.94	28.2
CO4 MVI-5-21	3353500	3	208V-230V	~3	2" 300#	363	60	64.75	62.16	67.42	38	38.4	43.79	1123.59	8.12-7.34	39.4
CO4 MVI-5-23	3353501	3	208V-230V	~3	2" 300#	363	60	64.75	62.16	67.42	38	38.4	45.21	1131.59	8.12-7.34	39.4
CO4 MVI-5-25	3353502	3	208V-230V	~3	2" 300#	363	60	64.75	62.16	67.42	38	38.4	46.62	1135.59	8.12-7.34	39.4
CO4 MVI-5-27	3353503	3	208V-230V	~3	2" 300#	363	60	64.75	62.16	67.42	38	38.4	48.04	1143.59	8.12-7.34	39.4
CO4 MVI-5-19	3353988	2	460V	~3	2" 300#	363	47	51.75	62.16	54.42	36	36.4	39.84	879.94	2.47	14.6
CO4 MVI-5-21	3353989	3	460V	~3	2" 300#	363	60	64.75	62.16	67.42	38	38.4	43.79	1123.59	3.67	20.2
CO4 MVI-5-23	3353990	3	460V	~3	2" 300#	363	60	64.75	62.16	67.42	38	38.4	45.21	1131.59	3.67	20.2
CO4 MVI-5-25	3353991	3	460V	~3	2" 300#	363	60	64.75	62.16	67.42	38	38.4	46.62	1135.59	3.67	20.2
CO4 MVI-5-27	3353992	3	460V	~3	2" 300#	363	60	64.75	62.16	67.42	38	38.4	48.04	1143.59	3.67	20.2
CO4 MVI-5-19	3354477	2	575V	~3	2" 300#	363	47	51.75	62.16	54.42	36	38.22	39.84	883.18	1.98	15
CO4 MVI-5-21	3354478	3	575V	~3	2" 300#	363	60	64.75	62.16	67.42	38	40.22	43.79	1127.64	2.9	15
CO4 MVI-5-23	3354479	3	575V	~3	2" 300#	363	60	64.75	62.16	67.42	38	40.22	45.21	1135.64	2.9	15
CO4 MVI-5-25	3354480	3	575V	~3	2" 300#	363	60	64.75	62.16	67.42	38	40.22	46.62	1139.64	2.9	15
CO4 MVI-5-27	3354481	3	575V	~3	2" 300#	363	60	64.75	62.16	67.42	38	40.22	48.04	1147.64	2.9	15