
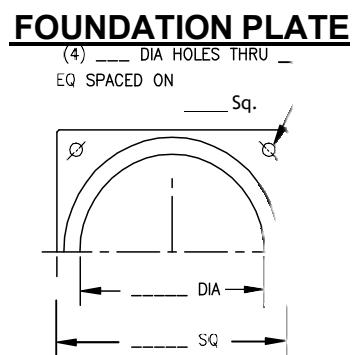
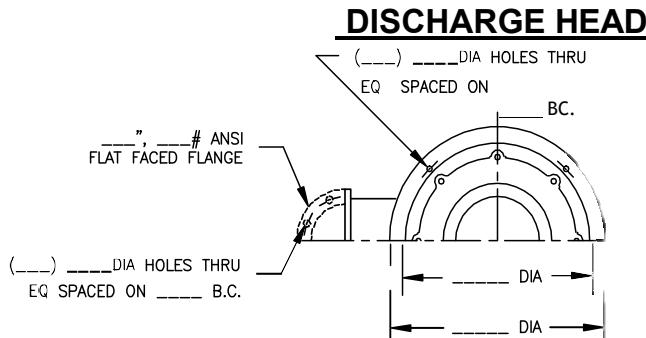


Wilo-Vertical Turbine

Cast Discharge Head, Open Lineshaft, Threaded Column

wilo®

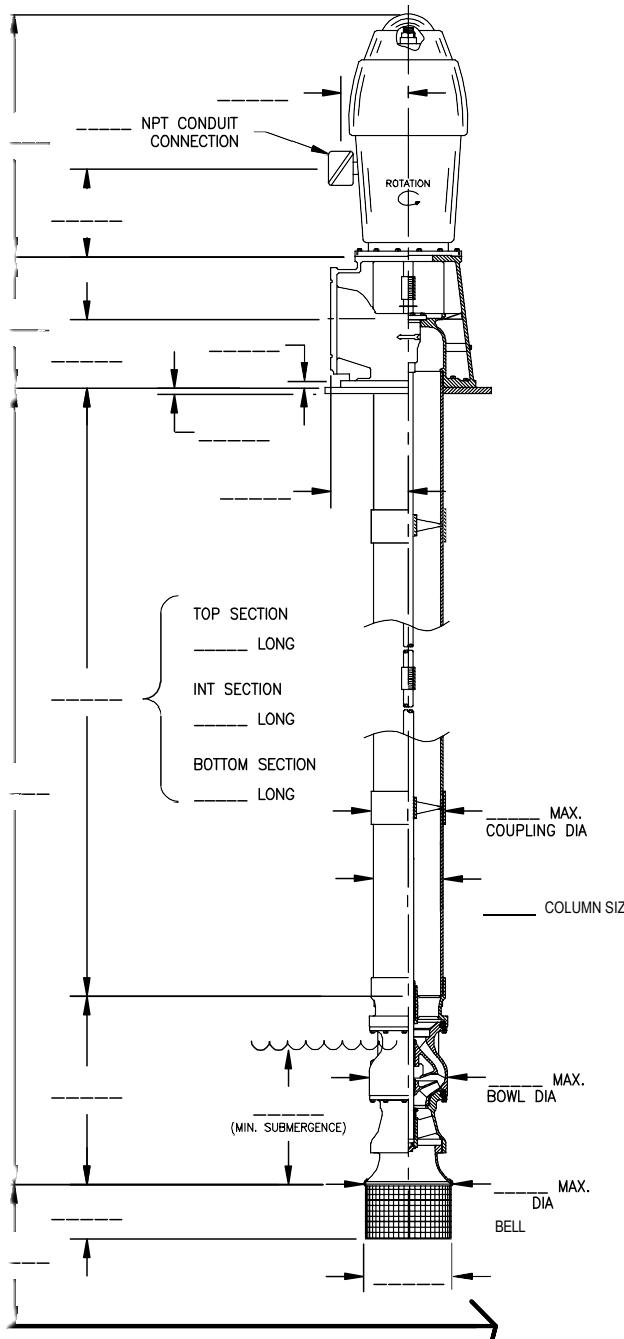

NOTES:

1. ALL DIMENSIONS ARE IN INCHES ± 0.375

*THE MIN. SUBMERSION IS FROM THE BOTTOM OF THE BELL OR SUCT. CASE TO THE WATER LEVEL.

THIS VALUE IS REQUIRED TO PREVENT VORTEXING ONLY. THIS VALUE MAY NEED TO INCREASE TO PROVIDE ADEQUATE NPSHa

CUSTOMER					P.O. NUMBER
JOB NAME					TAG NAME
PUMP SIZE AND MODEL		GPM	TDH	RPM	ROTATION
MOTOR	HP	FRAME	PHASE	HERTZ	VOLTS
CERTIFIED FOR		CERTIFIED BY		DATE	

WARNING

DO NOT OPERATE THIS MACHINE WITH OUT PROTECTIVE GUARD IN PLACE. ANY OPERATION OF THIS MACHINE WITHOUT PROTECTIVE GUARD CAN RESULT IN SEVERE BODILY INJURY.