

A white Wilo Rain 3 pump unit is mounted on a concrete wall. The unit has a black control panel on the top right with a small digital display and the Wilo logo. To the left of the unit is a square metal ventilation grille. Several white pipes are visible, some running horizontally and others vertically, secured with metal clamps. A black pipe is visible at the bottom left. The background is a plain concrete wall.


wilo

INDIENSTSTELLING RAIN 3


wilo

Stap 1. Activeer het service menu


Ga naar **Menu 7.01** Ontgrendeling
Parameterwijziging

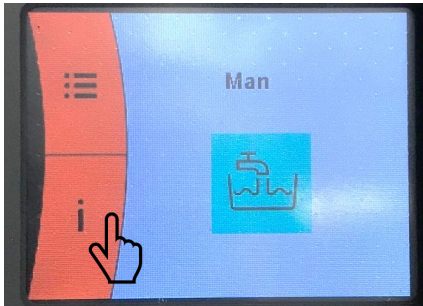

Druk 5 seconden op 'i'
Hierdoor wordt Niveau 3 actief

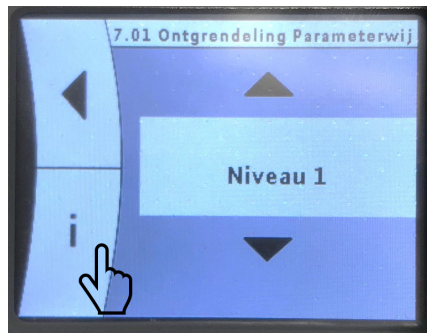


Kies 'Niveau 3'

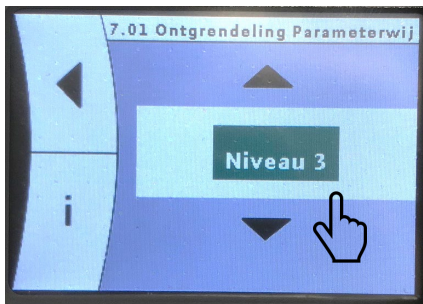


Stap 2. Stel de citerne hoogtes in


Ga naar **Menu 5.26** Vorm van de citerne
Kies 'geen'

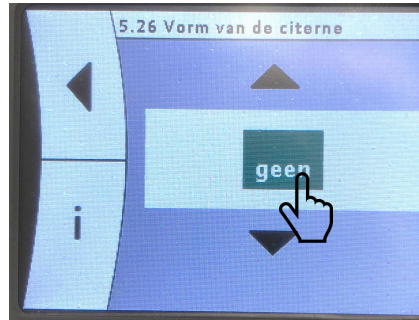

Ga naar **Menu 5.29** Hoogte en diameter citerne
Kies een correcte hoogte (vb. 250 cm)

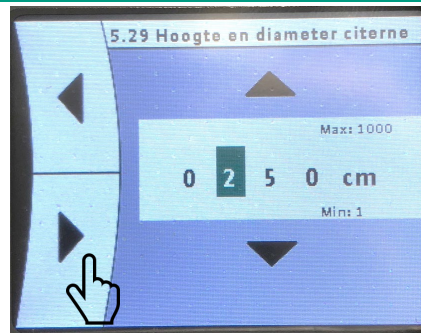


Ga naar **Menu 5.51** Max. niveau overloop citerne
Kies een correcte hoogte (vb. 200 cm)

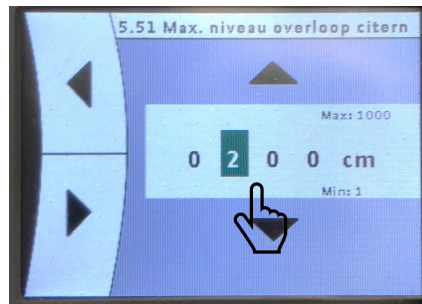


Stap 3. Activeer de Rain 3


Ga naar **Menu 3.02** Hoofdpomp modus
Kies 'Auto'

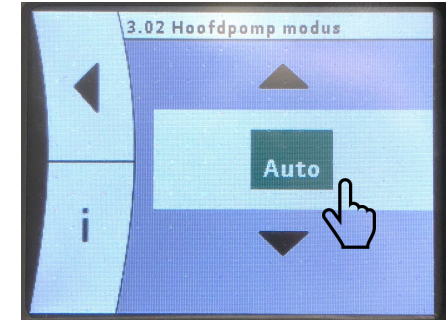

Ga naar **Menu 3.06** ventiel modus
Kies 'Auto'

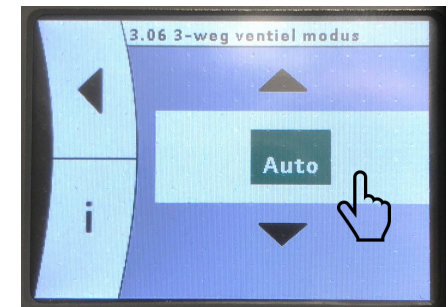

Ga naar **Menu 6.01** Alarm Alarm reset
Kies 'Reset'

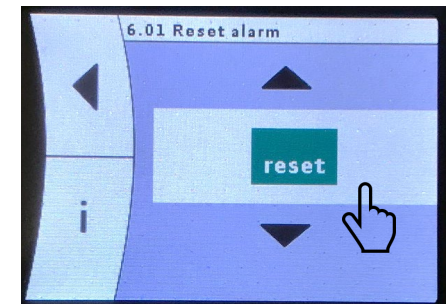

Het Wilo-team staat voor u klaar



U heeft vragen of informatie nodig?

U heeft technische bijstand nodig?



+32 2 482 33 33



info.be@wilo.com



+32 2 482 33 47

+32 2 482 33 42



service.be@wilo.com

Wilo's digitale toepassingen

Snel, gemakkelijk & efficient!

Vind ze op de Wilo website of in de Wilo-Assistent App.



www.wilo.be



Wilo Assistant App

