


Pioneering for You

wilo

Submersible Mixer

EMU TR 226-3.42-4/8V

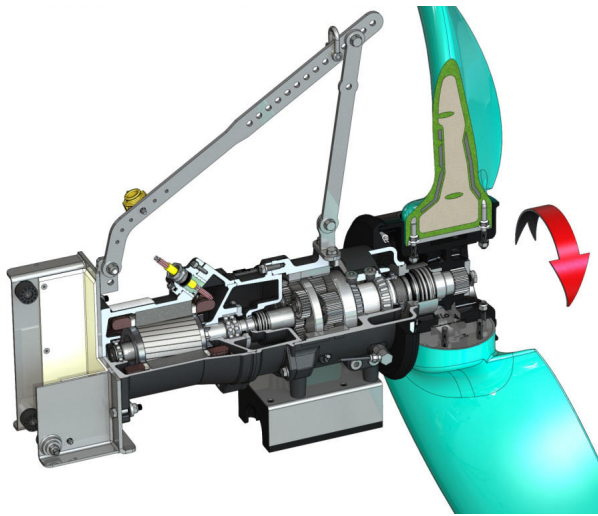

Unit

Power consumption at duty point $P_{1,1}$	3.20 kW
Max. thrust F	31340 N
Thrust to power ratio	9794 N/kW
Max. weight* m	200 kg
Explosion protection ATEX	optional
Explosion protection FM	optional
Protection class motor	IP68

Propeller

Propeller model	2-blade propeller with self-cleaning hub; backward-curved as a result clogging- and entwining-free
Nominal propeller diameter	2600 mm
Propeller speed n	42 1/min
Transmission ratio	34.658

Filling quantities and types

Filling prechamber	Gear oil CLP220
Filling volume prechamber V	1.00 l
Filling gear chamber	Gear oil CLP220
Fill volume gear chamber V	0.60 l
Filling sealing chamber	White oil
Fill volume sealing chamber V	1.10 l

Motor/electronics

Motor type	T 17-4/8V (Ex)
Motor design	Submersible motor acc. IEC 60034-1
Mains connection	3~400 V, 50 Hz
Rated current I_N	5.90 A
Starting current - direct I_A	28.00 A
Starting current - star-delta I_A	10.00 A
Power consumption $P_{1 max}$	3.50 kW
Rated power P_2	2.50 kW
Speed original n	1400 1/min
Motor efficiency class	-
Efficiency η_M	72.0 %
Power factor $\cos \varphi$	0.86
Min. fluid temperature T	3 °C
Max. fluid temperature T	40 °C
Max. immersion depth	20 m
Insulation class	H
Max. switching frequency t	15 1/h
min. switching break t	3 min
Starting torque M	42 Nm
Moment of inertia	0.00730 kg/m ²
Motor bearings	1 grooved ball bearing, 1 two-row inclined ball bearing

Materials

Motor housing	5.1301, EN-GJL-250
Static gaskets	FKM
Motor shaft	1.4021, X20Cr13
Seal on motor side	FKM
Seal, gear/sealing chamber	SiC/SiC, Q1Q1VGG
Gear housing	5.1301, EN-GJL-250
Planetary gear	1.7131, 16MnCr5
Hollow gear	1.5216, 17MnV6
Sun gear	1.7131, 16MnCr5
Output shaft	1.4462, X2CrNiMoN22-5-3
Seal, gear chamber/prechamber	FKM
Sealing chamber	5.1301, EN-GJL-250
Seal on the fluid side	SiC/SiC, Q1Q1VGG
Seal bushing	1.4571, X6CrNiMoTi17-12-2
Propeller hub	5.3106, EN-GJS-400-15
Propeller	VE-GFRP

Gear

Gear construction type	m 2.0 as per DIN 780-1:1977-05 /P10 (ISO54: 1996-12); sun and planetary gears case hardened and sanded, internal gear butt-jointed
Gear bearings	Six needle roller bearing (planetary), two tapered roller bearings (output shaft adjustable type), gearing permanently fixed
Service life L_{h10}	100,000 operating hours, ISO 281:2007-02

*maximum weight including accessories