
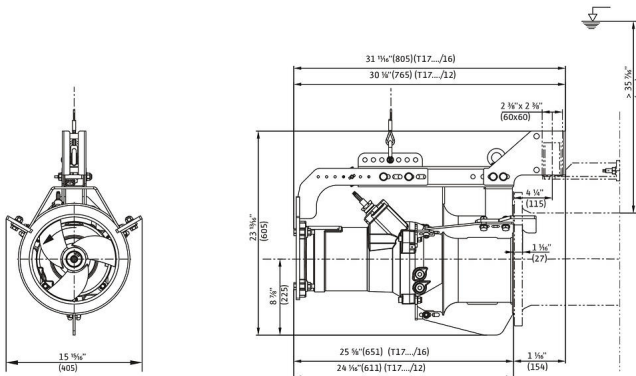


Pioneering for You

## Recirculation pump

### Flumen OPTI RZP 25-3.114-6/8 S1

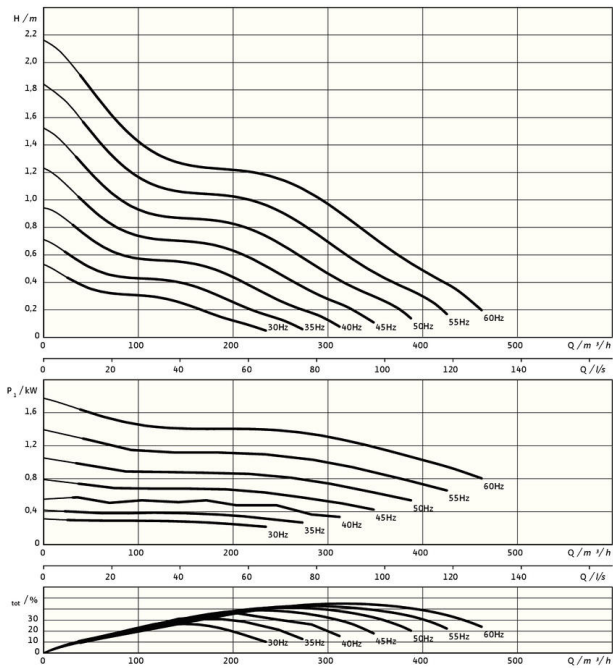

\*maximum weight including accessories

#### Unit

Max. weight* <i>m</i>	90 kg
Explosion protection ATEX ATEX	optional
Explosion protection FM FM	optional
Protection class motor	IP68

#### Propeller

Propeller model	3-blade propeller with self-cleaning hub; clogging- and entwining-free
Nominal propeller diameter <i>D<sub>nom</sub></i>	250 mm
Propeller speed <i>n</i>	1080 1/min
Transmission ratio	1.000

#### Filling quantities and types

Filling sealing chamber	White oil
Fill volume sealing chamber <i>V</i>	1.20 l

#### Motor/electronics

Motor type	T 17-6/8R (Ex)
Motor design	Submersible motor – surface-cooled
Mains connection	3~380 V, 60 Hz
Rated current <i>I<sub>N</sub></i>	5.50 A
Starting current – direct <i>I<sub>A</sub></i>	31.50 A
Starting current – star-delta <i>I<sub>A</sub></i>	11.00 A
Power consumption <i>P<sub>1 max</sub></i>	2.90 kW
Rated power <i>P<sub>2</sub></i>	2 kW
Speed original <i>n</i>	1080 1/min
Motor efficiency class	–
Efficiency <i>η<sub>M</sub></i>	70.0 %
Power factor <i>cos φ</i>	0.80
Min. fluid temperature <i>T<sub>min</sub></i>	3 °C
Max. fluid temperature <i>T<sub>max</sub></i>	40 °C
Max. immersion depth	20 m
Insulation class	H
Max. switching frequency <i>t</i>	15 rph
min. switching break <i>t</i>	3 min
Starting torque <i>M</i>	37 Nm
Moment of inertia	0.0112 kg/m <sup>2</sup>
Motor bearings	2 grooved ball bearing

#### Materials

Motor housing	5.1301, EN-GJL-250
Static gaskets	FKM
Motor shaft	1.4021, X20Cr13
Sealing chamber	1.4408, GX5CrNiMo19-11-2
Seal on the fluid side	SiC/SiC, Q1Q1VGG
Propeller hub	1.4408, GX5CrNiMo19-11-2
Propeller	1.4408, GX5CrNiMo19-11-2
Flow housing	1.4571, X6CrNiMoTi17-12-2