




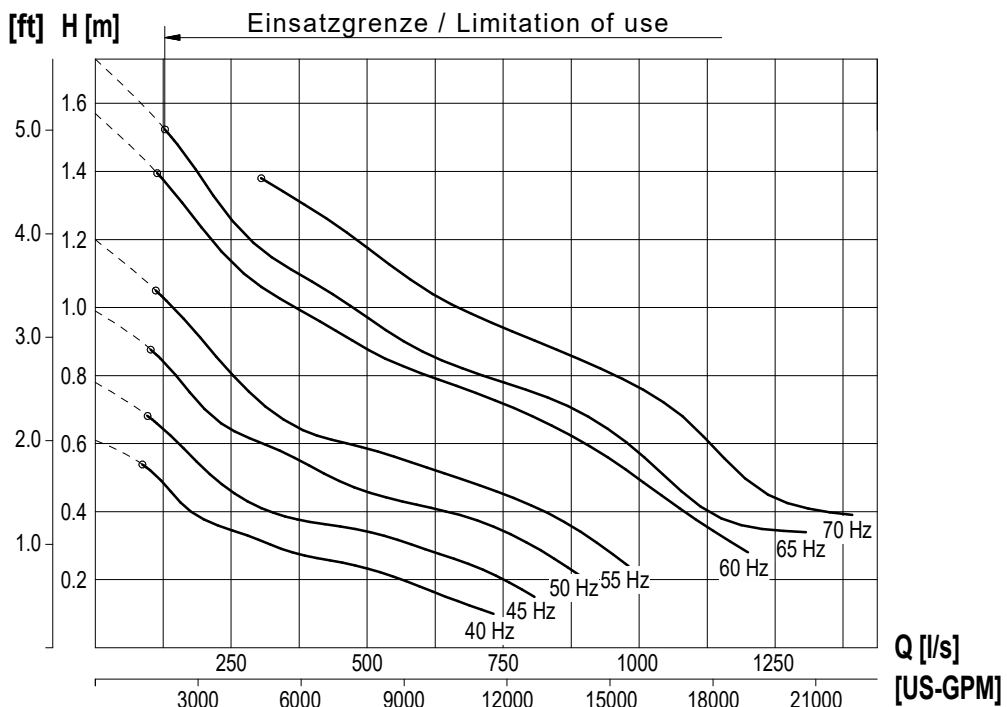


Kennlinie Performance curve	Baureihe Type	<b>RZP 80-3.29-6/32</b>	Nr./ No. Version	<b>KL 0359-1</b> 2024-02-07 Sp
Netz / Main connection	<b>460V~3 / 60Hz</b>		Nennzahl Nom. Speed	<b>292 [1/min]</b>
Motortyp / Motor type	<b>T 20-6/32R (Ex)</b>		Kugeldurchgang Free ball passage	<b>240 [mm]</b>
Nenn-Laufrad Ø / Nom. Impeller Ø	<b>800 [mm]</b>		Effizienzklasse / Efficiency class	<b>DIN EN 60034-30-1</b>
Nennleistung / Rated output [P2]	<b>16,00 [kW]</b>	Max.-Leistung / power input [P1]	<b>19,10 [kW]</b>	
			Hydr.Nr.	<b>6089789</b>

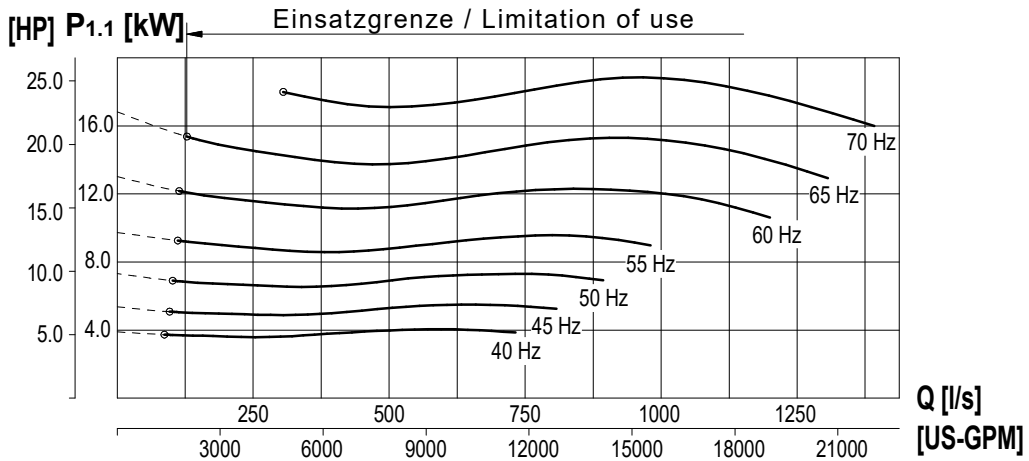

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control

Kennlinie Performance curve	Baureihe Type	<b>RZP 80-3.29-6/32</b>	Nr./ No.	<b>KL 0359-2</b>	
			Version	2024-02-07	Sp
Netz / Main connection		<b>460V~3 / 60Hz</b>		Nennzahl Nom. Speed	<b>292 [1/min]</b>
Motortyp / Motor type		<b>T 20-6/32R (Ex)</b>		Nom. Speed	
Nenn-Laufrad Ø / Nom. Impeller Ø		<b>800 [mm]</b>		Kugeldurchgang Free ball passage	<b>240 [mm]</b>
Effizienzklasse / Efficiency class		<b>DIN EN 60034-30-1</b>		Free ball passage	
Nennleistung / Rated output [P2]		<b>16,00 [kW]</b>	Max.-Leistung / power input [P1]	<b>19,10 [kW]</b>	
				Hydr.Nr.	<b>6089789</b>

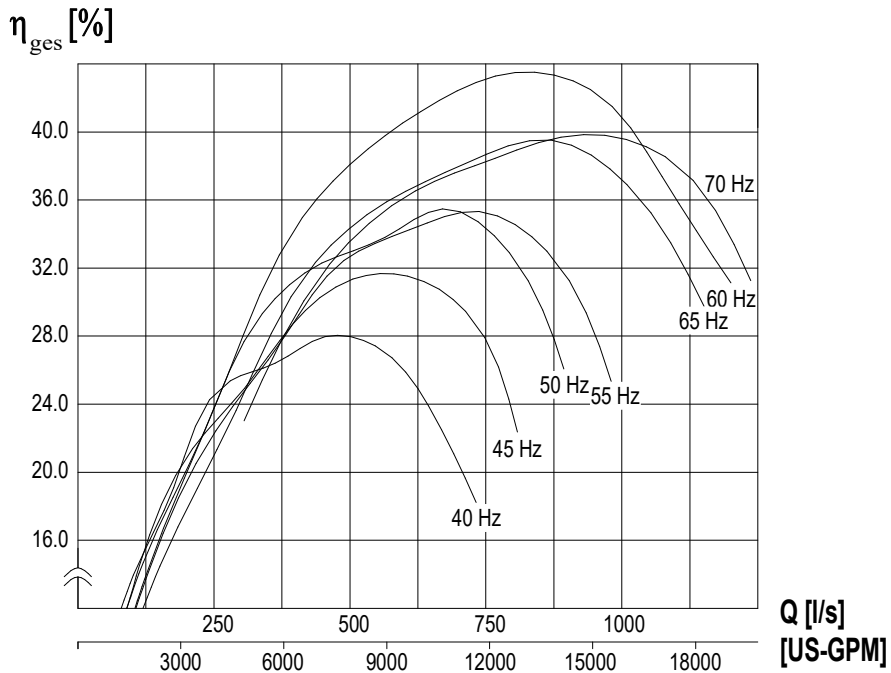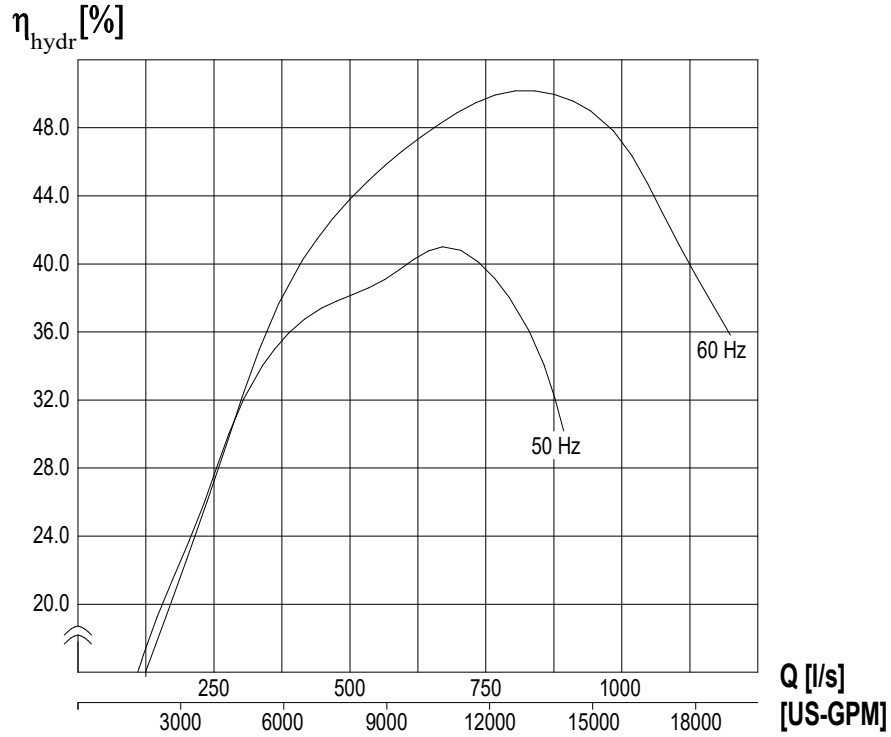

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control