

Submittal Data Sheet

Wilo NL-HE – Base Mounted End Suction Pumps




NL-HE 2 x 1.25 x 5 (2 Pole)



Project:	
Engineer:	
Contractor:	
Submitted By:	Date:
Approved By:	Date:

Tag #	Model #	Flow (USGPM)	Head (Feet)	HP	Enclosure	Frame	Cycle	Phase	Voltage	RPM
	NL-HE 2 x 1.25 x 5						60Hz	3		

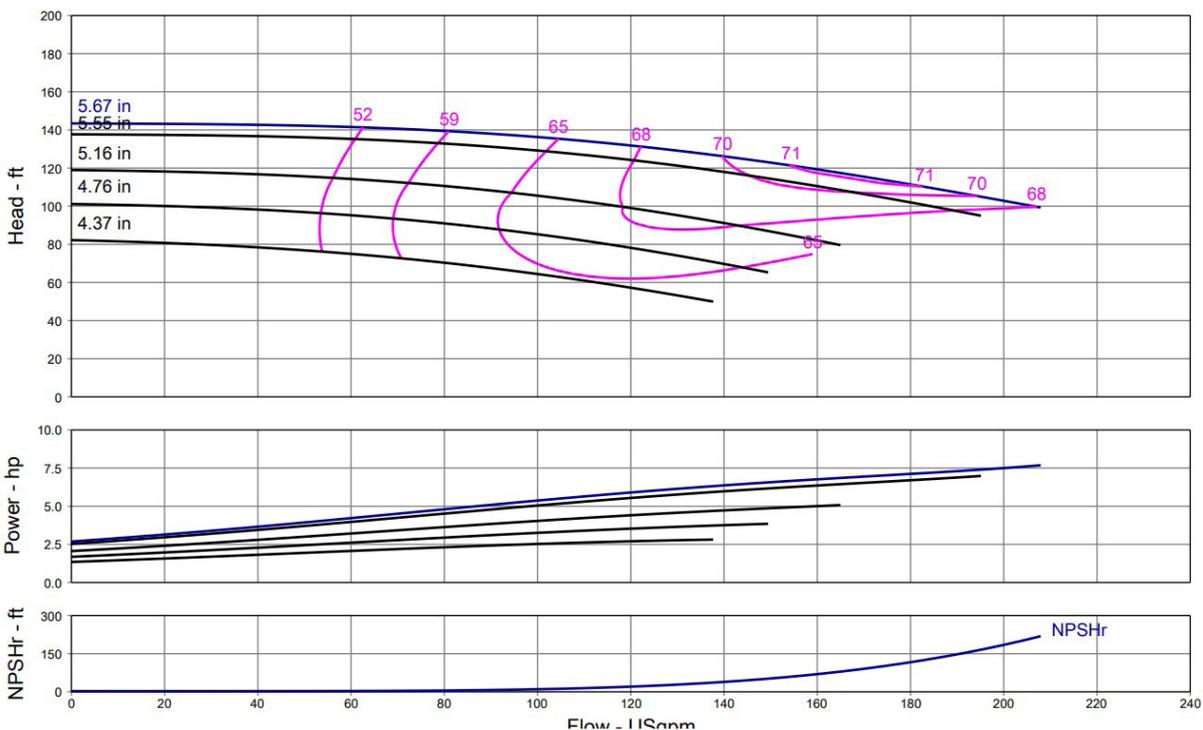

Technical Data	
PEI	
0.95	
Approved Fluids	
Heating Water	
Cooling and cold water	
Pressure /Temperature Ratings	
Ambient Temperature:	+5 °F to +104 °F (-15 °C to +40 °C)
Max Working Pressure & Temperature:	189 psi (up to 284 °F Fluid Temperature) 232 psi (up to 248 °F Fluid Temperature)
Water-Glycol Mixtures for 20-40% glycol and fluid temp ≤ 104°F (40°C)	

Materials of Construction	
Pump Housing	EN-GL-250 Gray Cast Iron
Impeller	EN 1.4408 Cast Stainless Steel
Impeller (optional)	CC480K Bronze or EN-GJL 1030 Cast Iron
Pump Shaft	1.4021 + QT700 Stainless Steel
Mechanical Seal	Carbon/silicon carbide/EPDM (E1)
Other Mechanical Seals	Avail. on request
Additional Spacer Coupling	Avail. on request
Other:	

Approval Stamp


Submittal Data Sheet

Wilo NL-HE - Base Mounted End Suction Pumps



Dimensions & Weights

Wilo NL-HE

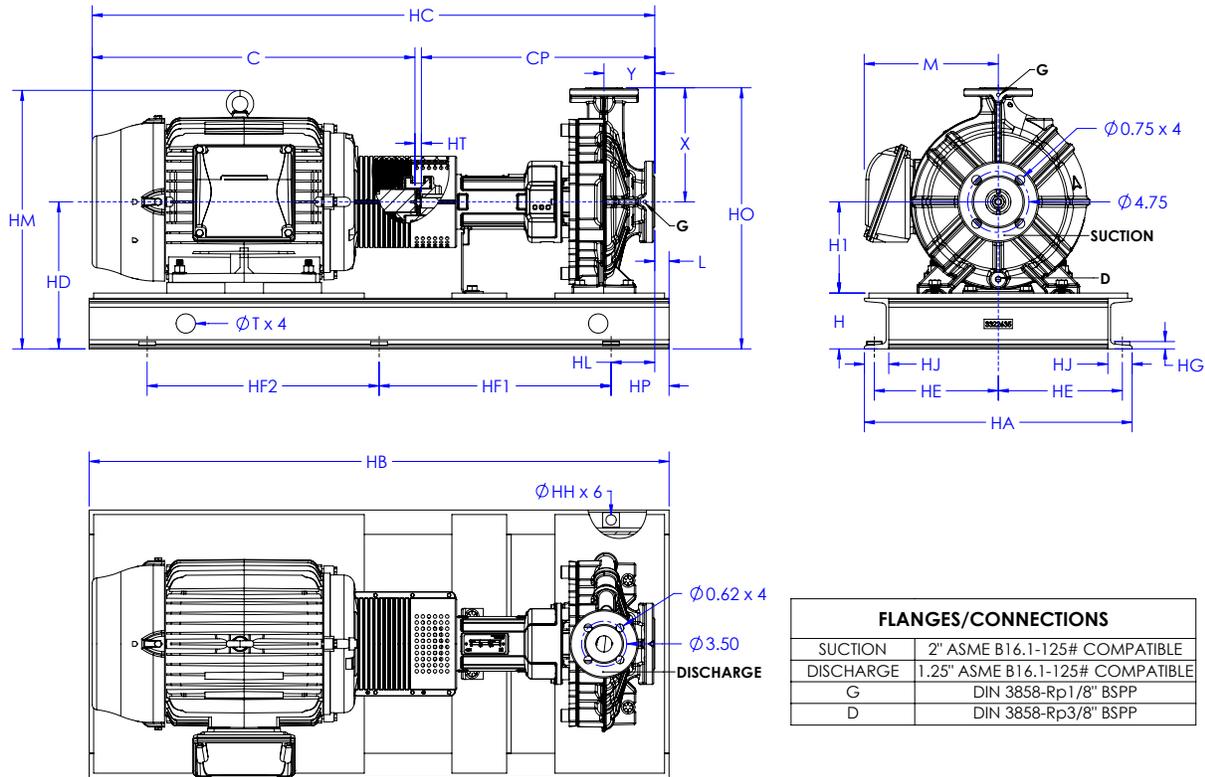

NL-HE 2 x 1.25 x 5

Motor								Dimensions - Inches																		Wt. (lb)						
PEI	HP	ENCL	Frame	Volt	RPM	EFF	PF	H	H1	X	HD	HO	HM	M	HA	HE	HG	HJ	Y	HT	HC	C	CP	L	HL		T	HH	HP	HF1	HF2	HB
0.95	0.95	3	ODP	208-230/460	3480	85.5	0.9	4.3	4.4	5.5	8.7	14.3	12.0	5.9	16.3	7.4	0.6	1.9	3.1	0.50	30.2	12.3	17.3	1.7	1.8	1.5	0.8	3.5	13.0	13.0	33.0	219
0.95	0.95	3	TEFC	208-230/460	3515	86.5	0.88	4.3	4.5	5.5	9.0	14.5	13.4	7.6	17.3	7.9	0.6	1.9	3.1	0.50	33.7	15.9	17.3	1.7	2.8	1.5	0.8	4.5	13.0	13.0	35.0	278
0.95	0.95	3	ODP	575	3480	85.5	0.9	4.3	4.4	5.5	8.7	14.3	12.0	5.9	16.3	7.4	0.6	1.9	3.1	0.50	30.2	12.3	17.3	1.7	1.8	1.5	0.8	3.5	13.0	13.0	33.0	218
0.95	0.95	3	TEFC	575	3515	86.5	0.88	4.3	4.5	5.5	9.0	14.5	13.4	7.6	17.3	7.9	0.6	1.9	3.1	0.50	33.7	15.9	17.3	1.7	2.8	1.5	0.8	4.5	13.0	13.0	35.0	274
0.95	0.95	5	ODP	208-230/460	3510	86.5	0.88	4.3	4.5	5.5	9.0	14.5	13.0	6.7	17.3	7.9	0.6	1.9	3.1	0.50	32.6	14.8	17.3	1.7	2.8	1.5	0.8	4.5	13.0	13.0	35.0	245
0.95	0.95	5	TEFC	208-230/460	3485	88.5	0.89	4.3	4.5	5.5	9.0	14.5	13.4	7.6	17.3	7.9	0.6	1.9	3.1	0.50	33.7	15.9	17.3	1.7	2.8	1.5	0.8	4.5	13.0	13.0	35.0	281
0.95	0.95	5	ODP	575	3510	86.5	0.88	4.3	4.5	5.5	9.0	14.5	13.0	6.7	17.3	7.9	0.6	1.9	3.1	0.50	32.6	14.8	17.3	1.7	2.8	1.5	0.8	4.5	13.0	13.0	35.0	245
0.95	0.95	5	TEFC	575	3485	88.5	0.89	4.3	4.5	5.5	9.0	14.5	13.4	7.6	17.3	7.9	0.6	1.9	3.1	0.50	33.7	15.9	17.3	1.7	2.8	1.5	0.8	4.5	13.0	13.0	35.0	279
0.95	0.95	7.5	ODP	208-230/460	3500	88.5	0.9	4.3	4.5	5.5	9.0	14.5	13.0	6.7	17.3	7.9	0.6	1.9	3.1	0.50	33.0	15.2	17.3	1.7	2.8	1.5	0.8	4.5	13.0	13.0	35.0	259
0.95	0.95	7.5	TEFC	208-230/460	3485	89.5	0.88	4.3	4.5	5.5	9.0	14.5	13.4	7.6	17.3	7.9	0.6	1.9	3.1	0.50	33.7	15.9	17.3	1.7	2.8	1.5	0.8	4.5	13.0	13.0	35.0	285
0.95	0.95	7.5	ODP	575	3500	88.5	0.9	4.3	4.5	5.5	9.0	14.5	13.0	6.7	17.3	7.9	0.6	1.9	3.1	0.50	33.0	15.2	17.3	1.7	2.8	1.5	0.8	4.5	13.0	13.0	35.0	259
0.95	0.95	7.5	TEFC	575	3520	89.5	0.88	4.3	5.2	5.5	9.7	15.2	15.3	8.6	17.3	7.9	0.6	1.9	3.1	0.92	37.7	19.5	17.3	1.7	2.8	1.5	0.8	4.5	15.0	15.0	39.0	360
0.95	0.95	10	ODP	208-230/460	3535	89.5	0.88	4.3	5.2	5.5	9.7	15.2	14.6	8.0	17.3	7.9	0.6	1.9	3.1	0.92	35.2	17.0	17.3	1.7	2.8	1.5	0.8	4.5	15.0	15.0	39.0	319
0.95	0.95	10	TEFC	208-230/460	3510	90.2	0.9	4.3	5.2	5.5	9.7	15.2	15.3	8.6	17.3	7.9	0.6	1.9	3.1	0.92	37.7	19.5	17.3	1.7	2.8	1.5	0.8	4.5	15.0	15.0	39.0	364
0.95	0.95	10	ODP	575	3535	89.5	0.88	4.3	5.2	5.5	9.7	15.2	14.6	8.0	17.3	7.9	0.6	1.9	3.1	0.92	35.2	17.0	17.3	1.7	2.8	1.5	0.8	4.5	15.0	15.0	39.0	319
0.95	0.95	10	TEFC	575	3510	90.2	0.9	4.3	5.2	5.5	9.7	15.2	15.3	8.6	17.3	7.9	0.6	1.9	3.1	0.92	37.7	19.5	17.3	1.7	2.8	1.5	0.8	4.5	15.0	15.0	39.0	362