

Submittal Data Sheet

Wilco NL-HE - Base Mounted End Suction Pumps




NL-HE 2.5 x 2 x 6 (2 Pole)



Project:	
Engineer:	
Contractor:	
Submitted By:	Date:
Approved By:	Date:

Tag #	Model #	Flow (USGPM)	Head (Feet)	HP	Enclosure	Frame	Cycle	Phase	Voltage	RPM
	NL-HE 2.5 x 2 x 6						60Hz	3		

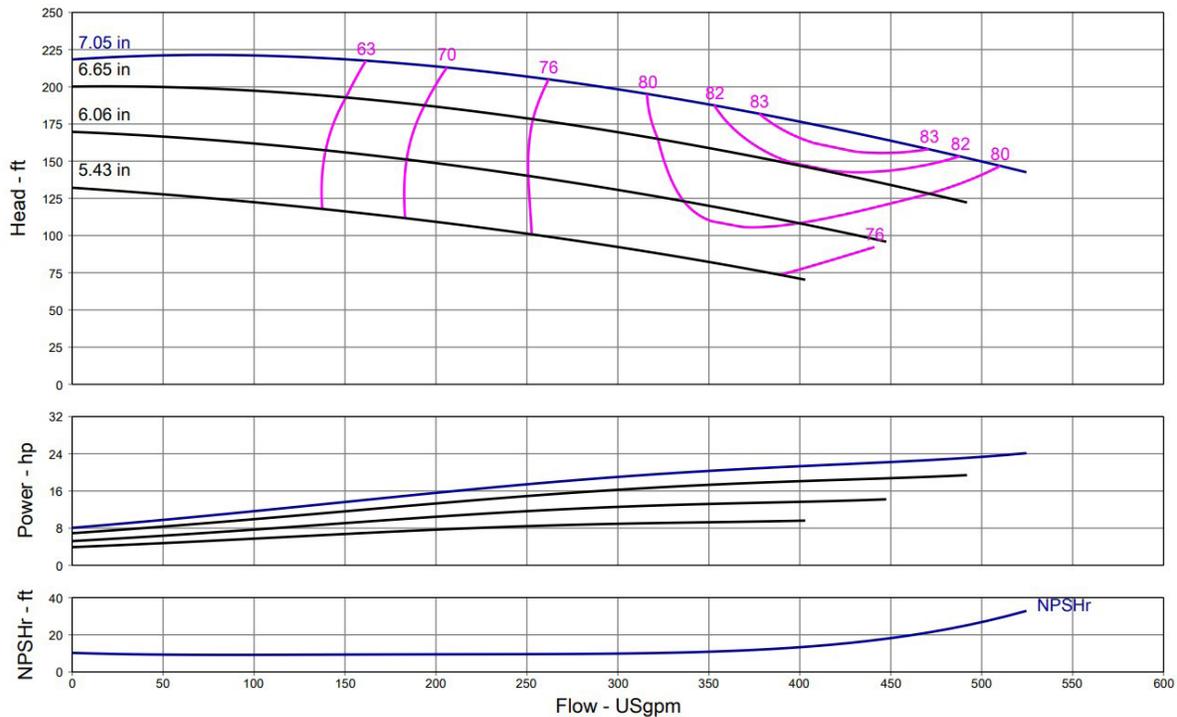

Technical Data	
PEI	
0.94	
Approved Fluids	
Heating Water	
Cooling and cold water	
Pressure /Temperature Ratings	
Ambient Temperature:	+5 °F to +104 °F (-15 °C to +40 °C)
Max Working Pressure & Temperature:	189 psi (up to 284 °F Fluid Temperature) 232 psi (up to 248 °F Fluid Temperature)
Water-Glycol Mixtures for 20-40% glycol and fluid temp ≤ 104°F (40°C)	

Materials of Construction	
Pump Housing	EN-GL-250 Gray Cast Iron
Impeller	EN 1.4408 Cast Stainless Steel
Impeller (optional)	CC480K Bronze or EN-GJL 1030 Cast Iron
Pump Shaft	1.4021 + QT700 Stainless Steel
Mechanical Seal	Carbon/silicon carbide/EPDM (E1)
Other Mechanical Seals	Avail. on request
Additional Spacer Coupling	Avail. on request
Other:	

Approval Stamp


Submittal Data Sheet

Wilo NL-HE - Base Mounted End Suction Pumps



Dimensions & Weights

Wilo NL-HE

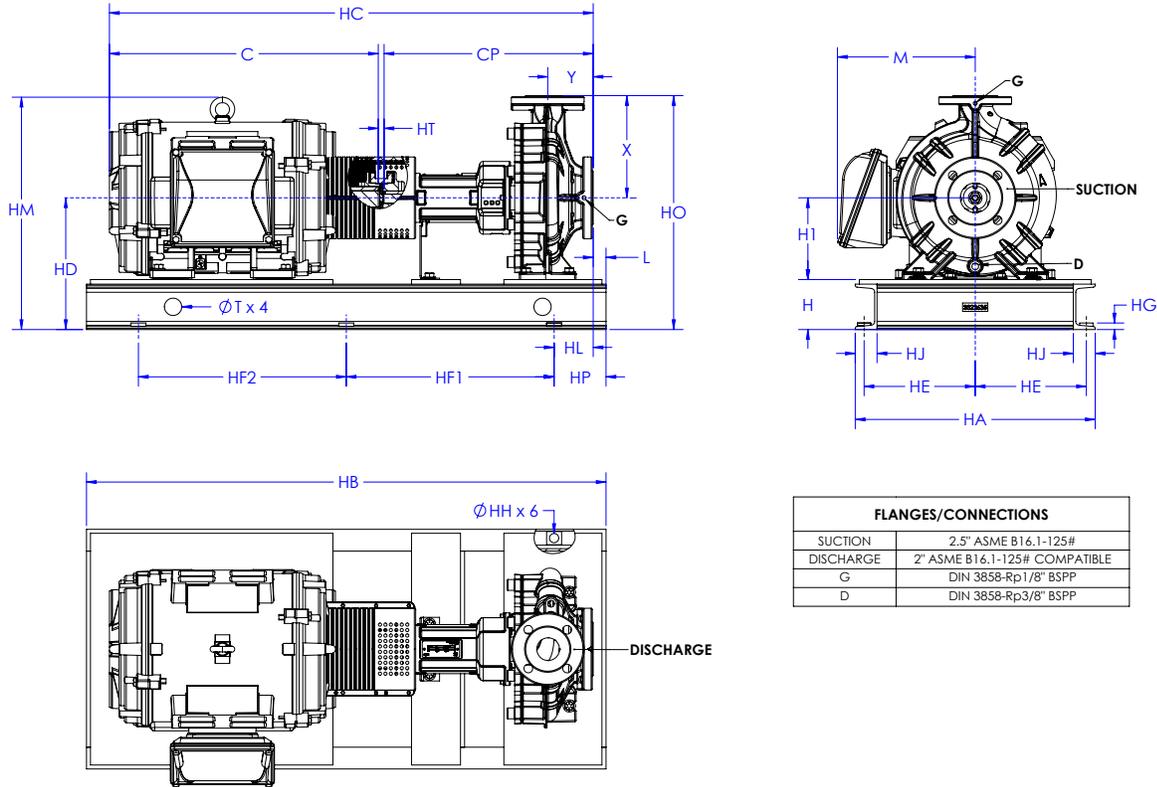

FLANGES/CONNECTIONS	
SUCTION	2.5" ASME B16.1-125#
DISCHARGE	2" ASME B16.1-125# COMPATIBLE
G	DIN 3858-Rp1/8" BSPP
D	DIN 3858-Rp3/8" BSPP

NL-HE 2.5 x 2 x 6

Motor								Dimensions - Inches																				Wt. (lb)				
PEI	HP	ENCL	Frame	Volt	RPM	EFF	PF	H	H1	X	HD	HO	HM	M	HA	HE	HG	HJ	Y	HT	HC	C	CP	L	HL	T	HH		HP	HF1	HF2	HB
0.94	10	ODP	213/5T	208-230/460	3535	89.5	0.88	4.3	6.3	7.1	10.6	17.7	15.5	8.0	17.3	7.9	0.6	1.9	3.9	0.69	35.8	17.0	18.1	1.0	3.5	1.5	0.8	4.5	15.0	15.0	39.0	341
0.94	10	TEFC	213/5T	208-230/460	3510	90.2	0.9	4.3	6.3	7.1	10.6	17.7	16.2	8.6	17.3	7.9	0.6	1.9	3.9	0.69	38.3	19.5	18.1	1.0	3.5	1.5	0.8	4.5	15.0	15.0	39.0	387
0.94	10	ODP	213/5T	575	3535	89.5	0.88	4.3	6.3	7.1	10.6	17.7	15.5	8.0	17.3	7.9	0.6	1.9	3.9	0.69	35.8	17.0	18.1	1.0	3.5	1.5	0.8	4.5	15.0	15.0	39.0	341
0.94	10	TEFC	213/5T	575	3510	90.2	0.9	4.3	6.3	7.1	10.6	17.7	16.2	8.6	17.3	7.9	0.6	1.9	3.9	0.69	38.3	19.5	18.1	1.0	3.5	1.5	0.8	4.5	15.0	15.0	39.0	385
0.94	15	ODP	213/5T	208-230/460	3535	90.2	0.89	4.3	6.3	7.1	10.6	17.7	15.5	8.0	17.3	7.9	0.6	1.9	3.9	0.69	36.6	17.8	18.1	1.0	3.5	1.5	0.8	4.5	15.0	15.0	39.0	356
0.94	15	TEFC	254/6T	208-230/460	3530	91	0.88	4.3	6.3	7.1	10.8	17.8	19.4	10.5	20.8	9.6	0.6	1.9	3.9	0.69	43.9	25.0	18.1	1.1	3.4	1.5	0.8	4.5	18.0	18.0	45.0	521
0.94	15	ODP	213/5T	575	3535	90.2	0.89	4.3	6.3	7.1	10.6	17.7	15.5	8.0	17.3	7.9	0.6	1.9	3.9	0.69	36.6	17.8	18.1	1.0	3.5	1.5	0.8	4.5	15.0	15.0	39.0	355
0.94	15	TEFC	254/6T	575	3530	91	0.88	4.3	6.3	7.1	10.8	17.8	19.4	10.5	20.8	9.6	0.6	1.9	3.9	0.69	43.9	25.0	18.1	1.1	3.4	1.5	0.8	4.5	18.0	18.0	45.0	520
0.94	20	ODP	254/6T	208-230/460	3525	91	0.87	4.3	6.3	7.1	10.8	17.8	16.5	9.5	20.8	9.6	0.6	1.9	3.9	0.69	39.3	20.5	18.1	1.1	3.4	1.5	0.8	4.5	18.0	18.0	45.0	424
0.94	20	TEFC	254/6T	208-230/460	3520	91	0.89	4.3	6.3	7.1	10.8	17.8	19.4	10.5	20.8	9.6	0.6	1.9	3.9	0.69	43.9	25.0	18.1	1.1	3.4	1.5	0.8	4.5	18.0	18.0	45.0	546
0.94	20	ODP	254/6T	575	3525	91	0.87	4.3	6.3	7.1	10.8	17.8	16.5	9.5	20.8	9.6	0.6	1.9	3.9	0.69	39.3	20.5	18.1	1.1	3.4	1.5	0.8	4.5	18.0	18.0	45.0	423
0.94	20	TEFC	254/6T	575	3520	91	0.89	4.3	6.3	7.1	10.8	17.8	19.4	10.5	20.8	9.6	0.6	1.9	3.9	0.69	43.9	25.0	18.1	1.1	3.4	1.5	0.8	4.5	18.0	18.0	45.0	545
0.94	25	ODP	254/6T	208-230/460	3530	91.7	0.87	4.3	6.3	7.1	10.8	17.8	16.5	9.5	20.8	9.6	0.6	1.9	3.9	0.69	39.3	20.5	18.1	1.1	3.4	1.5	0.8	4.5	18.0	18.0	45.0	441
0.94	25	TEFC	284/6TS	208-230/460	3545	91.7	0.88	4.3	7.0	7.1	11.5	18.5	20.6	11.1	20.8	9.6	0.6	1.9	3.9	0.94	45.6	26.6	18.1	1.0	3.5	1.5	0.8	4.5	20.0	20.0	49.0	668
0.94	25	ODP	254/6T	575	3530	91.7	0.87	4.3	6.3	7.1	10.8	17.8	16.5	9.5	20.8	9.6	0.6	1.9	3.9	0.69	39.3	20.5	18.1	1.1	3.4	1.5	0.8	4.5	18.0	18.0	45.0	440
0.94	25	TEFC	284/6TS	575	3535	91.7	0.89	4.3	7.0	7.1	11.5	18.5	20.6	11.1	20.8	9.6	0.6	1.9	3.9	0.94	45.6	26.6	18.1	1.0	3.5	1.5	0.8	4.5	20.0	20.0	49.0	666
0.94	30	ODP	284TS	208-230/460	3545	91.7	0.86	4.3	7.0	7.1	11.5	18.5	20.2	11.9	20.8	9.6	0.6	1.9	3.9	0.94	41.0	22.0	18.1	1.1	3.4	1.5	0.8	4.5	18.0	18.0	45.0	566
0.94	30	TEFC	284/6TS	208-230/460	3540	91.7	0.89	4.3	7.0	7.1	11.5	18.5	20.6	11.1	20.8	9.6	0.6	1.9	3.9	0.94	45.6	26.6	18.1	1.0	3.5	1.5	0.8	4.5	20.0	20.0	49.0	686
0.94	30	ODP	284TS	575	3545	91.7	0.86	4.3	7.0	7.1	11.5	18.5	20.2	11.9	20.8	9.6	0.6	1.9	3.9	0.94	41.0	22.0	18.1	1.1	3.4	1.5	0.8	4.5	18.0	18.0	45.0	564
0.94	30	TEFC	284/6TS	575	3535	91.7	0.89	4.3	7.0	7.1	11.5	18.5	20.6	11.1	20.8	9.6	0.6	1.9	3.9	0.94	45.6	26.6	18.1	1.0	3.5	1.5	0.8	4.5	20.0	20.0	49.0	685