

# Submittal Data Sheet

Wilo NL-HE – Base Mounted End Suction Pumps




## NL-HE 6 x 5 x 16 (4 Pole)



Project:	
Engineer:	
Contractor:	
Submitted By:	Date:
Approved By:	Date:

Tag #	Model #	Flow (USGPM)	Head (Feet)	HP	Enclosure	Frame	Cycle	Phase	Voltage	RPM
	NL-HE 6 x 5 x 16						60Hz	3		

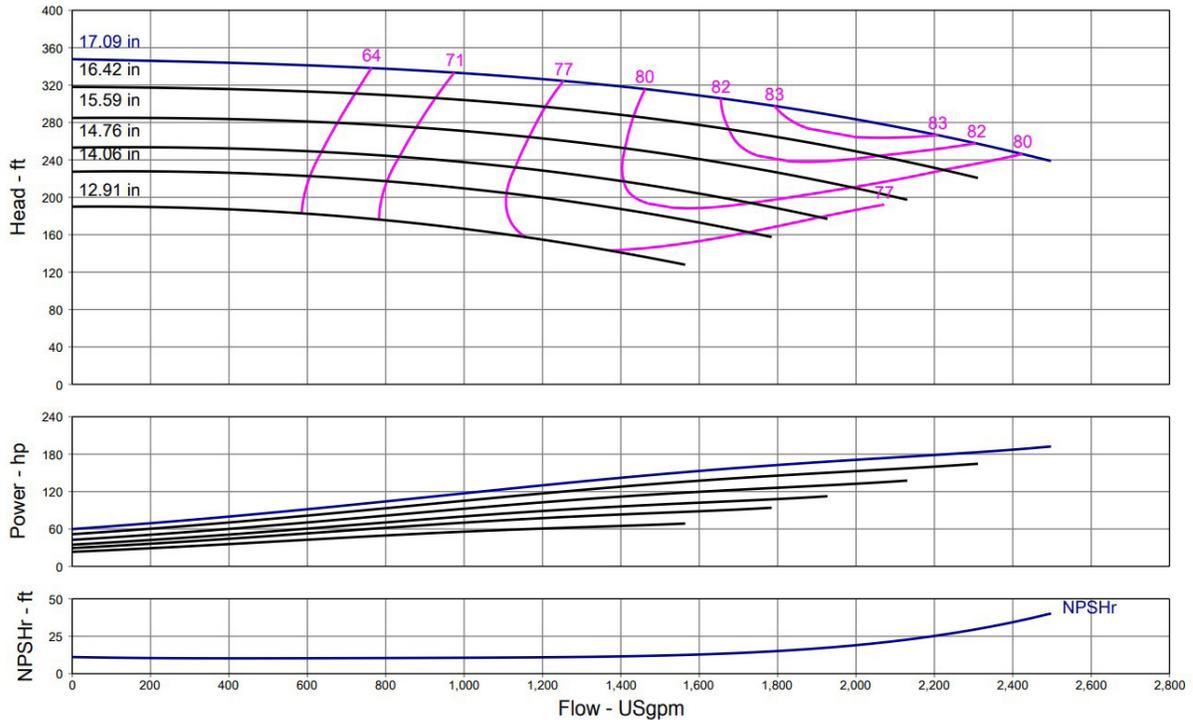

Technical Data	
PEI	
0.92	
Approved Fluids	
Heating Water	
Cooling and cold water	
Pressure /Temperature Ratings	
Ambient Temperature:	+5 °F to +104 °F (-15 °C to +40 °C)
Max Working Pressure & Temperature:	189 psi (up to 284 °F Fluid Temperature) 232 psi (up to 248 °F Fluid Temperature)
Water-Glycol Mixtures for 20-40% glycol and fluid temp ≤ 104°F (40°C)	

Materials of Construction	
Pump Housing	EN-GL-250 Gray Cast Iron
Impeller	EN 1.4408 Cast Stainless Steel
Impeller (optional)	CC480K Bronze or EN-GJL 1030 Cast Iron
Pump Shaft	1.4021 + QT700 Stainless Steel
Mechanical Seal	Carbon/silicon carbide/EPDM (E1)
Other Mechanical Seals	Avail. on request
Additional Spacer Coupling	Avail. on request
Other:	




# Submittal Data Sheet

## Wilo NL-HE - Base Mounted End Suction Pumps



### Dimensions & Weights

#### Wilo NL-HE

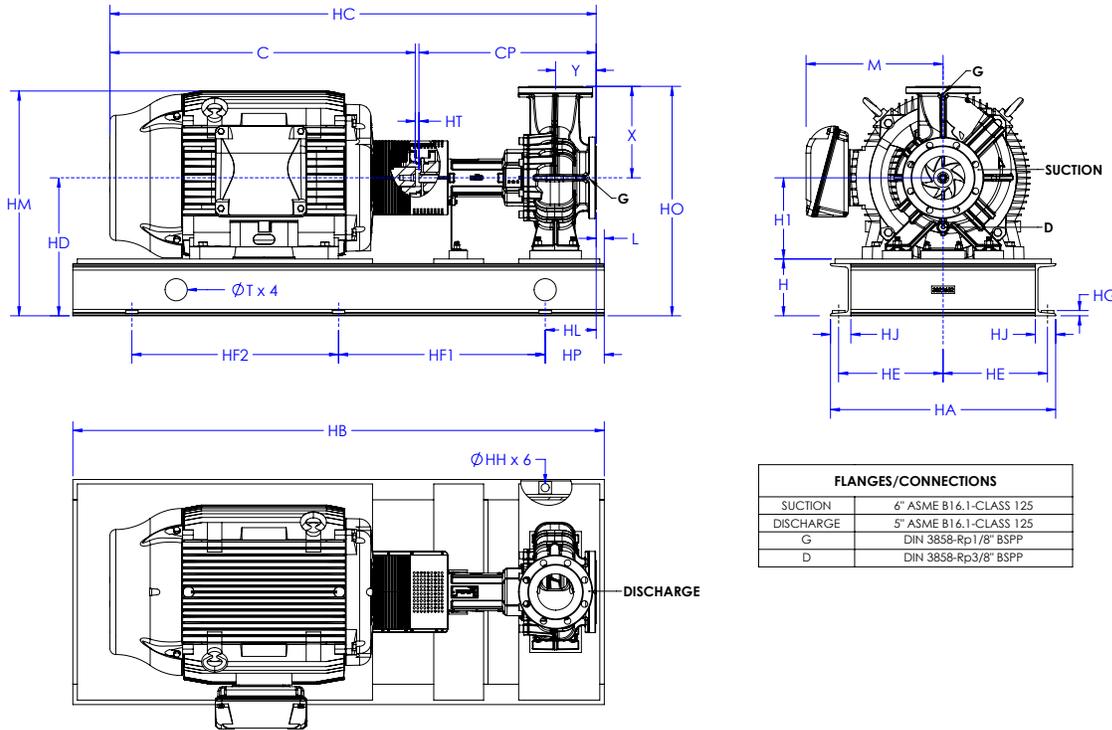

#### NL-HE 6 x 5 x 16

Motor								Dimensions - Inches																				Wt. (lb)				
PEI	HP	ENCL	Frame	Volt	RPM	EFF	PF	H	H1	X	HD	HO	HM	M	HA	HE	HG	HJ	Y	HT	HC	C	CP	L	HL	T	HH		HP	HF1	HF2	HB
0.92	75	ODP	364/5T	208-230/460	1780	95	0.85	6.0	12.4	15.7	18.4	34.1	30.6	15.6	26.2	12.2	0.6	2.4	5.5	0.50	56.5	29.7	26.4	1.2	5.8	2.3	1.0	7.0	23.0	23.0	60.0	1659
0.92	75	TEFC	364/5T	208-230/460	1780	95.4	0.83	6.1	12.4	15.7	18.5	34.2	27.5	16.0	28.7	13.4	0.6	2.4	5.5	0.50	61.4	34.5	26.4	1.3	6.7	2.3	1.0	8.0	25.0	25.0	66.0	1901
0.92	75	ODP	364/5T	575	1780	95	0.85	6.0	12.4	15.7	18.4	34.1	30.6	15.6	26.2	12.2	0.6	2.4	5.5	0.50	56.5	29.7	26.4	1.2	5.8	2.3	1.0	7.0	23.0	23.0	60.0	1656
0.92	75	TEFC	364/5T	575	1780	95.4	0.83	6.1	12.4	15.7	18.5	34.2	27.5	16.0	28.7	13.4	0.6	2.4	5.5	0.50	61.4	34.5	26.4	1.3	6.7	2.3	1.0	8.0	25.0	25.0	66.0	1897
0.92	100	ODP	404/5T	208-230/460	1780	95.4	0.86	6.1	12.4	15.7	18.5	34.2	30.7	15.6	29.7	13.9	0.6	2.4	5.5	0.50	61.0	34.1	26.4	1.3	6.7	2.3	1.0	8.0	25.0	25.0	66.0	1934
0.92	100	TEFC	404/5T	208-230/460	1780	95.4	0.87	6.1	12.4	15.7	18.5	34.2	28.0	16.0	29.7	13.9	0.6	2.4	5.5	0.50	66.6	39.7	26.4	1.3	6.7	2.3	1.0	8.0	25.0	25.0	66.0	2149
0.92	100	ODP	404/5T	575	1780	95.4	0.86	6.1	12.4	15.7	18.5	34.2	30.7	15.6	29.7	13.9	0.6	2.4	5.5	0.50	61.0	34.1	26.4	1.3	6.7	2.3	1.0	8.0	25.0	25.0	66.0	1928
0.92	100	TEFC	404/5T	575	1780	95.4	0.87	6.1	12.4	15.7	18.5	34.2	28.0	16.0	29.7	13.9	0.6	2.4	5.5	0.50	66.6	39.7	26.4	1.3	6.7	2.3	1.0	8.0	25.0	25.0	66.0	2142
0.92	125	ODP	404/5T	208-230/460	1780	95.4	0.86	6.1	12.4	15.7	18.5	34.2	30.7	15.6	29.7	13.9	0.6	2.4	5.5	0.50	61.0	34.1	26.4	1.3	6.7	2.3	1.0	8.0	25.0	25.0	66.0	2010
0.92	125	TEFC	444/5T	208-230/460	1780	95.4	0.85	7.7	12.4	15.7	20.1	35.9	31.9	18.6	31.5	14.7	0.7	2.8	5.5	1.40	72.9	45.1	26.4	1.6	5.9	3.0	1.1	7.5	30.0	30.0	75.0	2796
0.92	125	ODP	404/5T	575	1780	95.4	0.86	6.1	12.4	15.7	18.5	34.2	30.7	15.6	29.7	13.9	0.6	2.4	5.5	0.50	61.0	34.1	26.4	1.3	6.7	2.3	1.0	8.0	25.0	25.0	66.0	2005
0.92	125	TEFC	444/5T	575	1780	95.4	0.85	7.7	12.4	15.7	20.1	35.9	31.9	18.6	31.5	14.7	0.7	2.8	5.5	1.40	72.9	45.1	26.4	1.6	5.9	3.0	1.1	7.5	30.0	30.0	75.0	2792
0.92	150	ODP	444/5T	460	1784	95.8	0.85	6.1	12.4	15.7	18.5	34.2	33.0	18.7	29.7	13.9	0.6	2.4	5.5	1.40	66.1	38.3	26.4	1.3	6.7	2.3	1.0	8.0	25.0	25.0	66.0	2340
0.92	150	TEFC	444/5T	208-230/460	1780	95.8	0.85	7.7	12.4	15.7	20.1	35.9	31.9	18.6	31.5	14.7	0.7	2.8	5.5	1.40	72.9	45.1	26.4	1.6	5.9	3.0	1.1	7.5	30.0	30.0	75.0	3006
0.92	150	ODP	444/5T	575	1784	95.8	0.85	6.1	12.4	15.7	18.5	34.2	33.0	18.7	29.7	13.9	0.6	2.4	5.5	1.40	66.1	38.3	26.4	1.3	6.7	2.3	1.0	8.0	25.0	25.0	66.0	2336
0.92	150	TEFC	444/5T	575	1780	95.8	0.85	7.7	12.4	15.7	20.1	35.9	31.9	18.6	31.5	14.7	0.7	2.8	5.5	1.40	72.9	45.1	26.4	1.6	5.9	3.0	1.1	7.5	30.0	30.0	75.0	2997
0.92	200	ODP	444/5T	460	1783	95.8	0.84	6.1	12.4	15.7	18.5	34.2	33.0	18.7	29.7	13.9	0.6	2.4	5.5	1.40	67.6	39.8	26.4	1.3	6.7	2.3	1.0	8.0	25.0	25.0	66.0	2415
0.92	200	TEFC	445/7T	208-230/460	1785	96.2	0.85	7.7	12.4	15.7	20.1	35.9	36.6	20.6	31.5	14.7	0.7	2.8	5.5	1.40	76.5	48.7	26.4	1.7	5.8	3.0	1.1	7.5	30.0	30.0	75.0	3451
0.92	200	ODP	444/5T	575	1780	95	0.84	6.1	12.4	15.7	18.5	34.2	33.0	18.7	29.7	13.9	0.6	2.4	5.5	1.40	67.6	39.8	26.4	1.3	6.7	2.3	1.0	8.0	25.0	25.0	66.0	2415
0.92	200	TEFC	445/7T	575	1785	96.2	0.85	7.7	12.4	15.7	20.1	35.9	36.6	20.6	31.5	14.7	0.7	2.8	5.5	1.40	76.5	48.7	26.4	1.7	5.8	3.0	1.1	7.5	30.0	30.0	75.0	3434